


Ústí nad Labem - Generel VO


Náhradní teplota chromatičnosti

- 2700 K / 4000 K
- max.2700 K

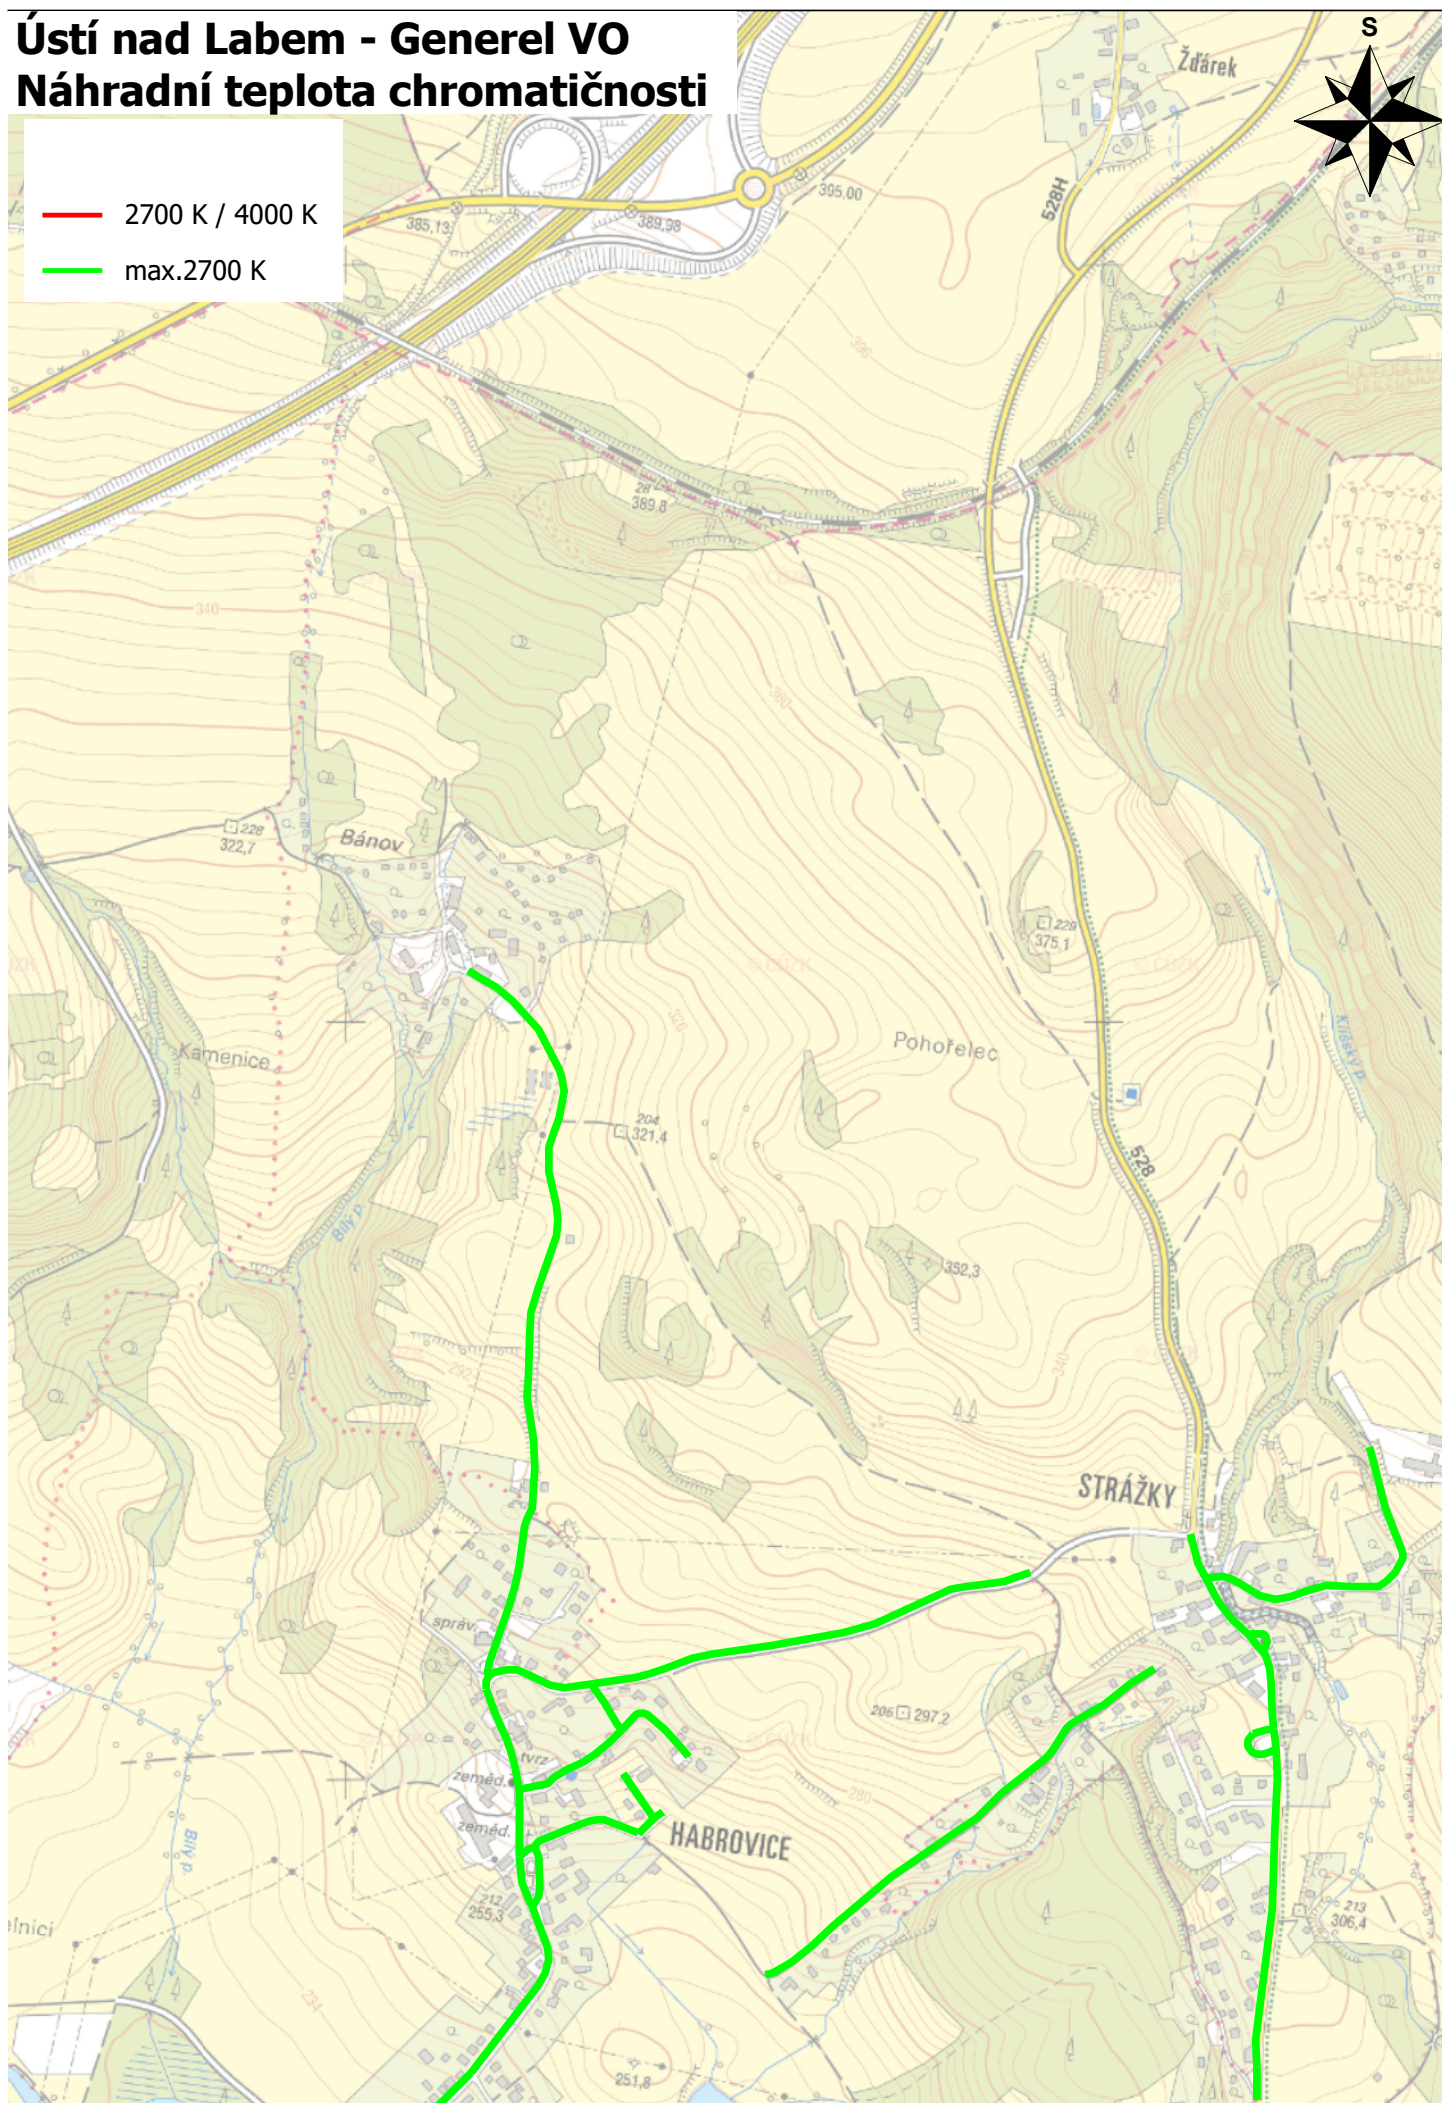


Měřítko 1 : 10000

100 0 100 200 300 400m

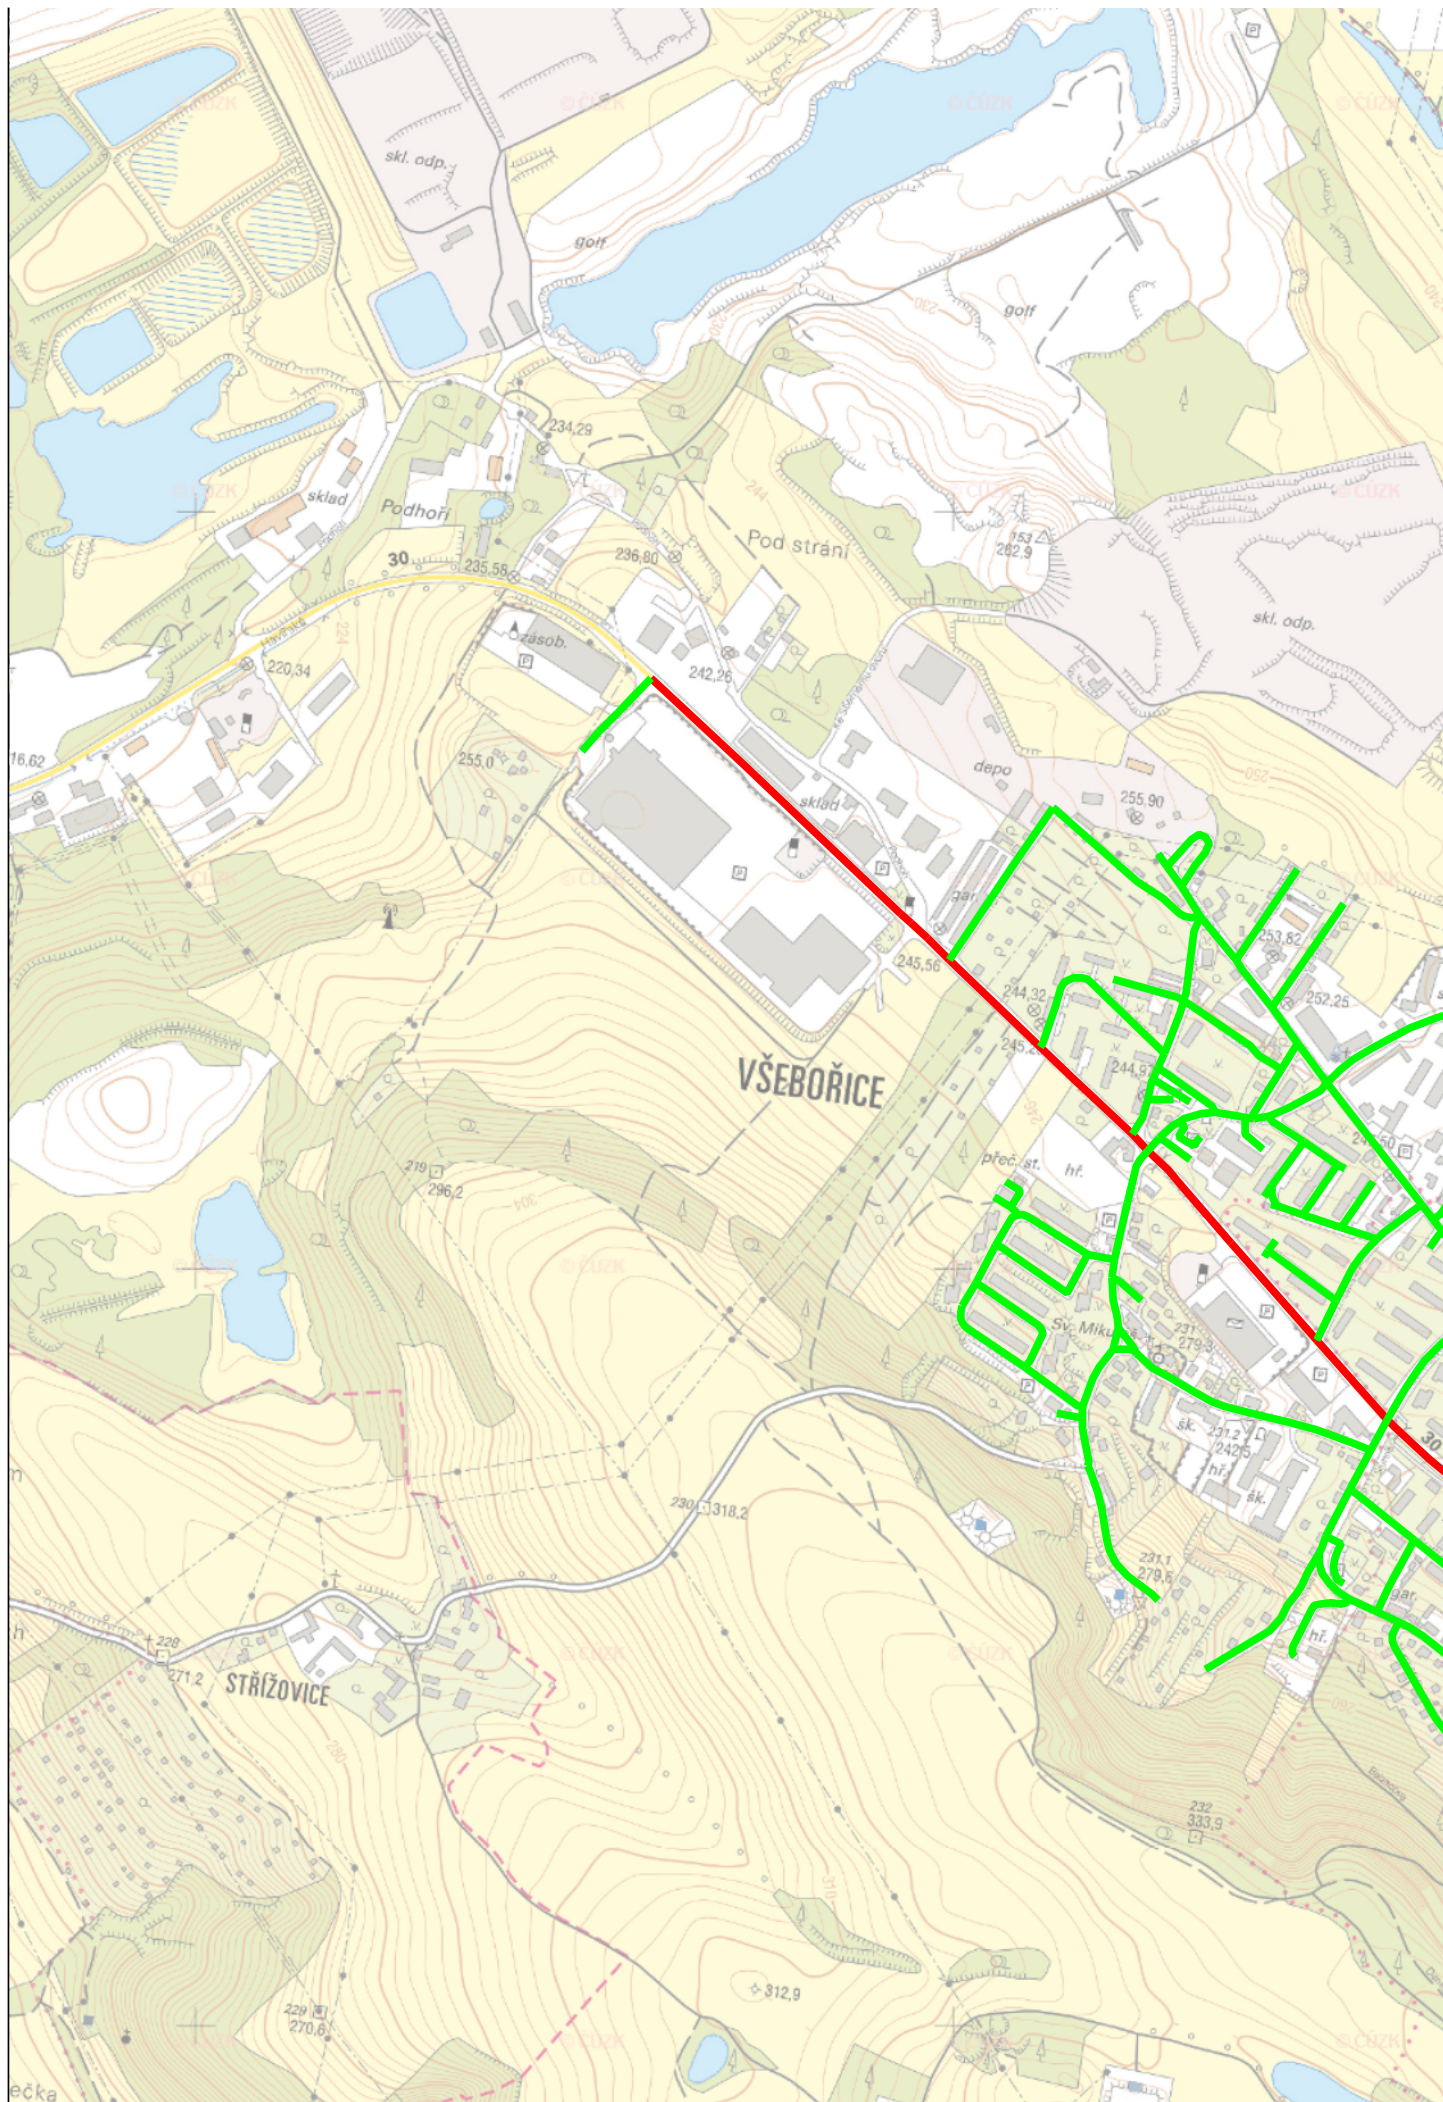


Měřítko 1 : 10000

100 0 100 200 300 400m

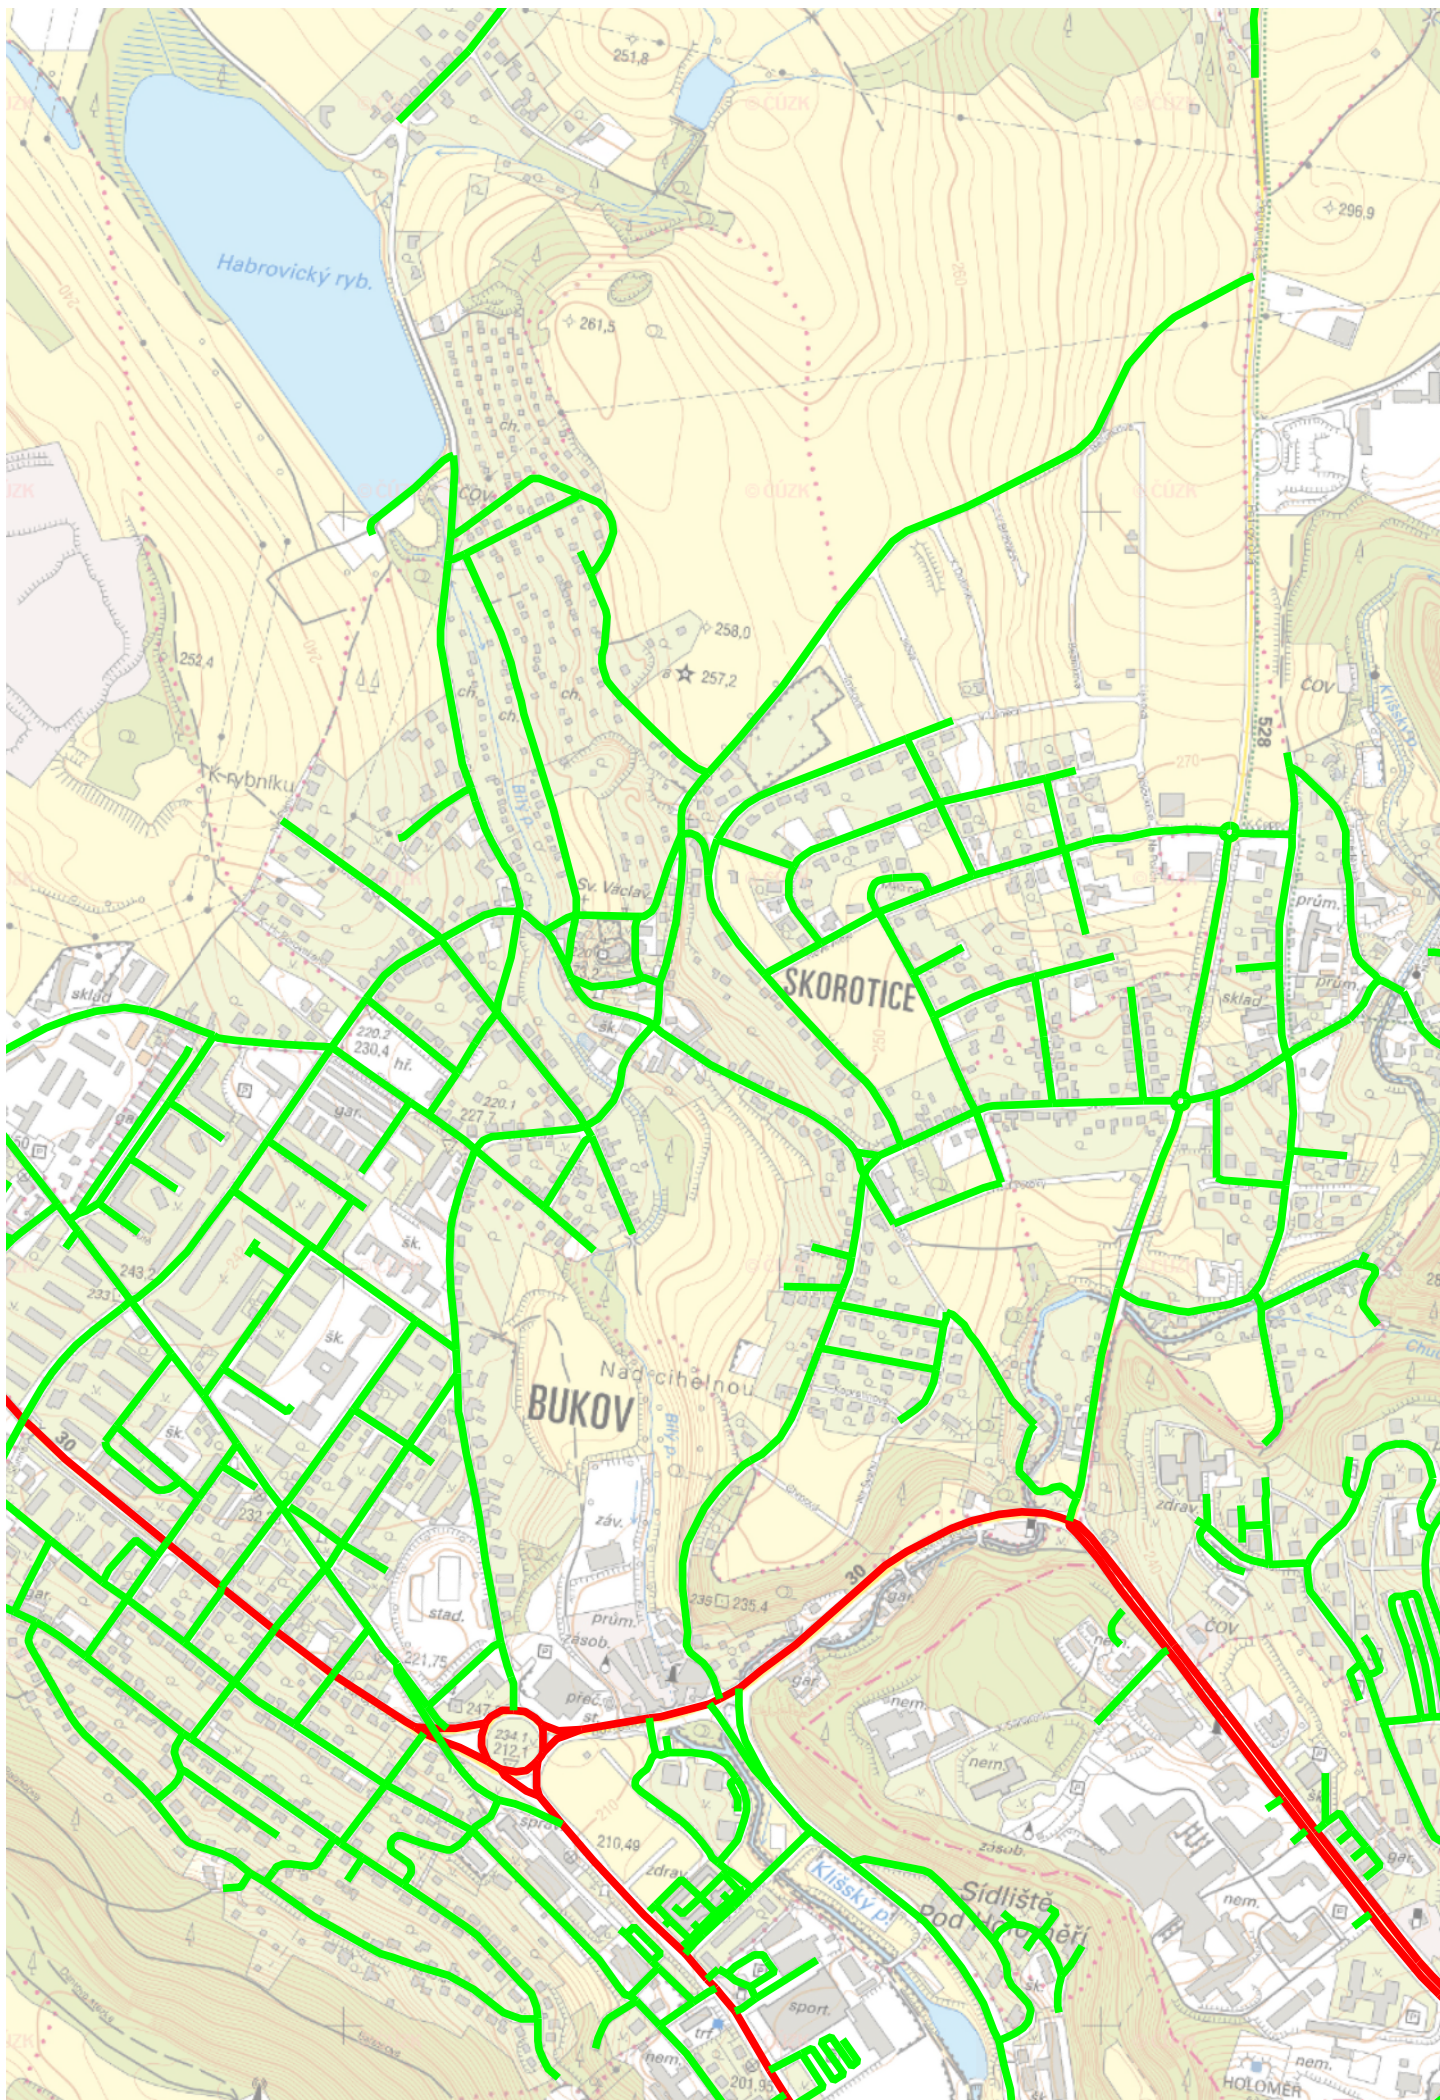


Měřítko 1 : 10000

100 0 100 200 300 400m

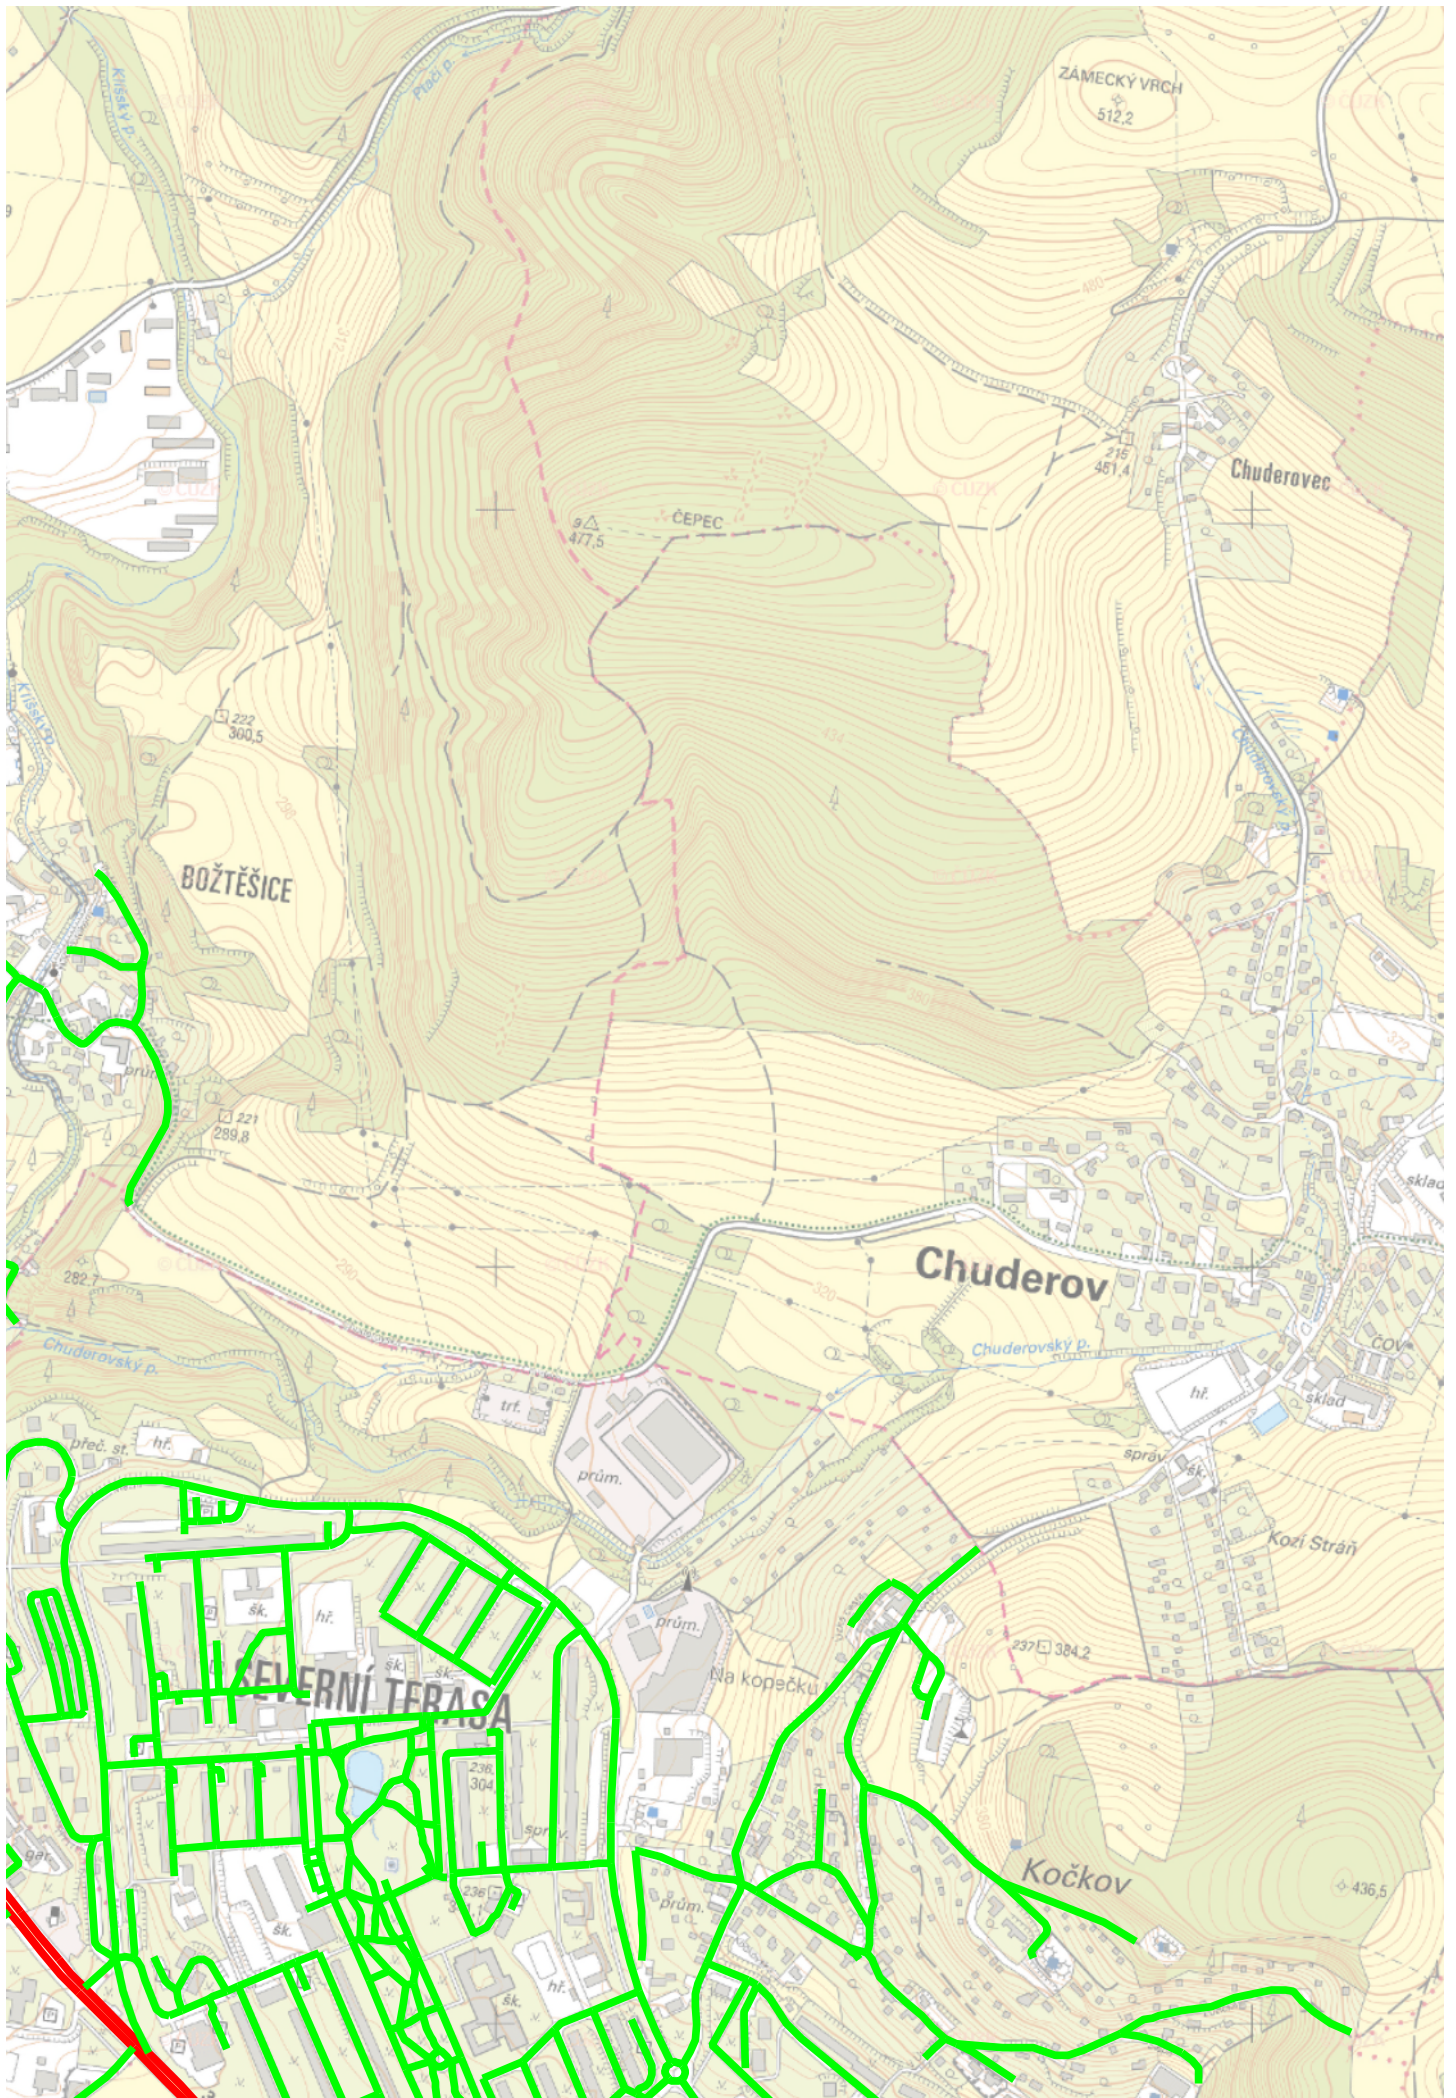


Měřítko 1 : 10000

100 0 100 200 300 400m

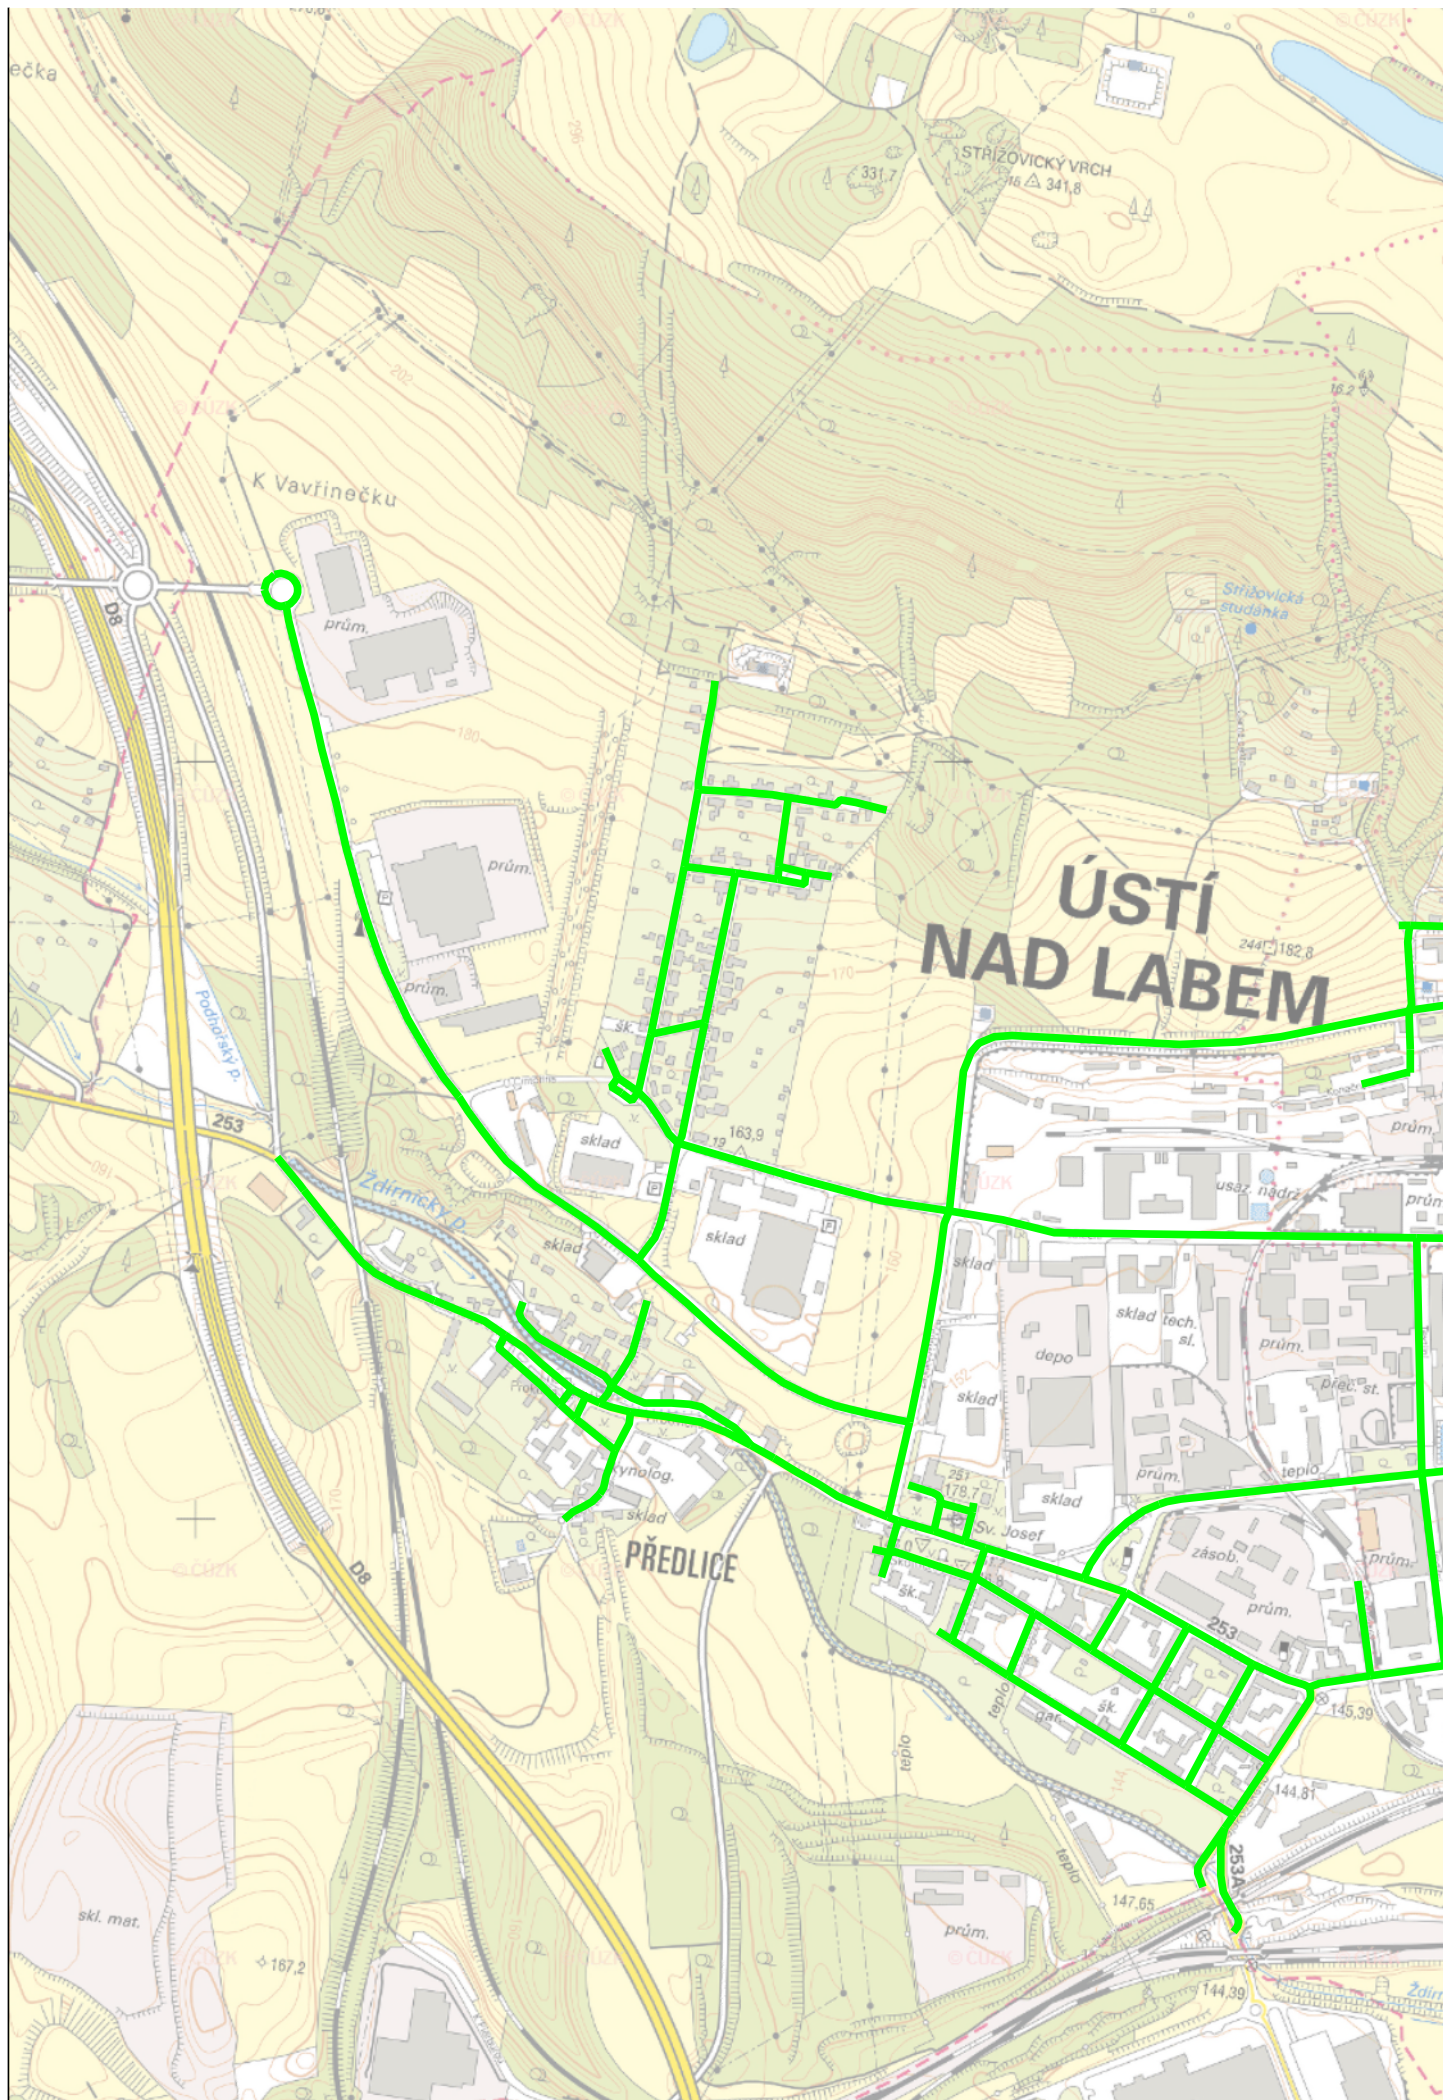


Měřítko 1 : 10000

100 0 100 200 300 400m

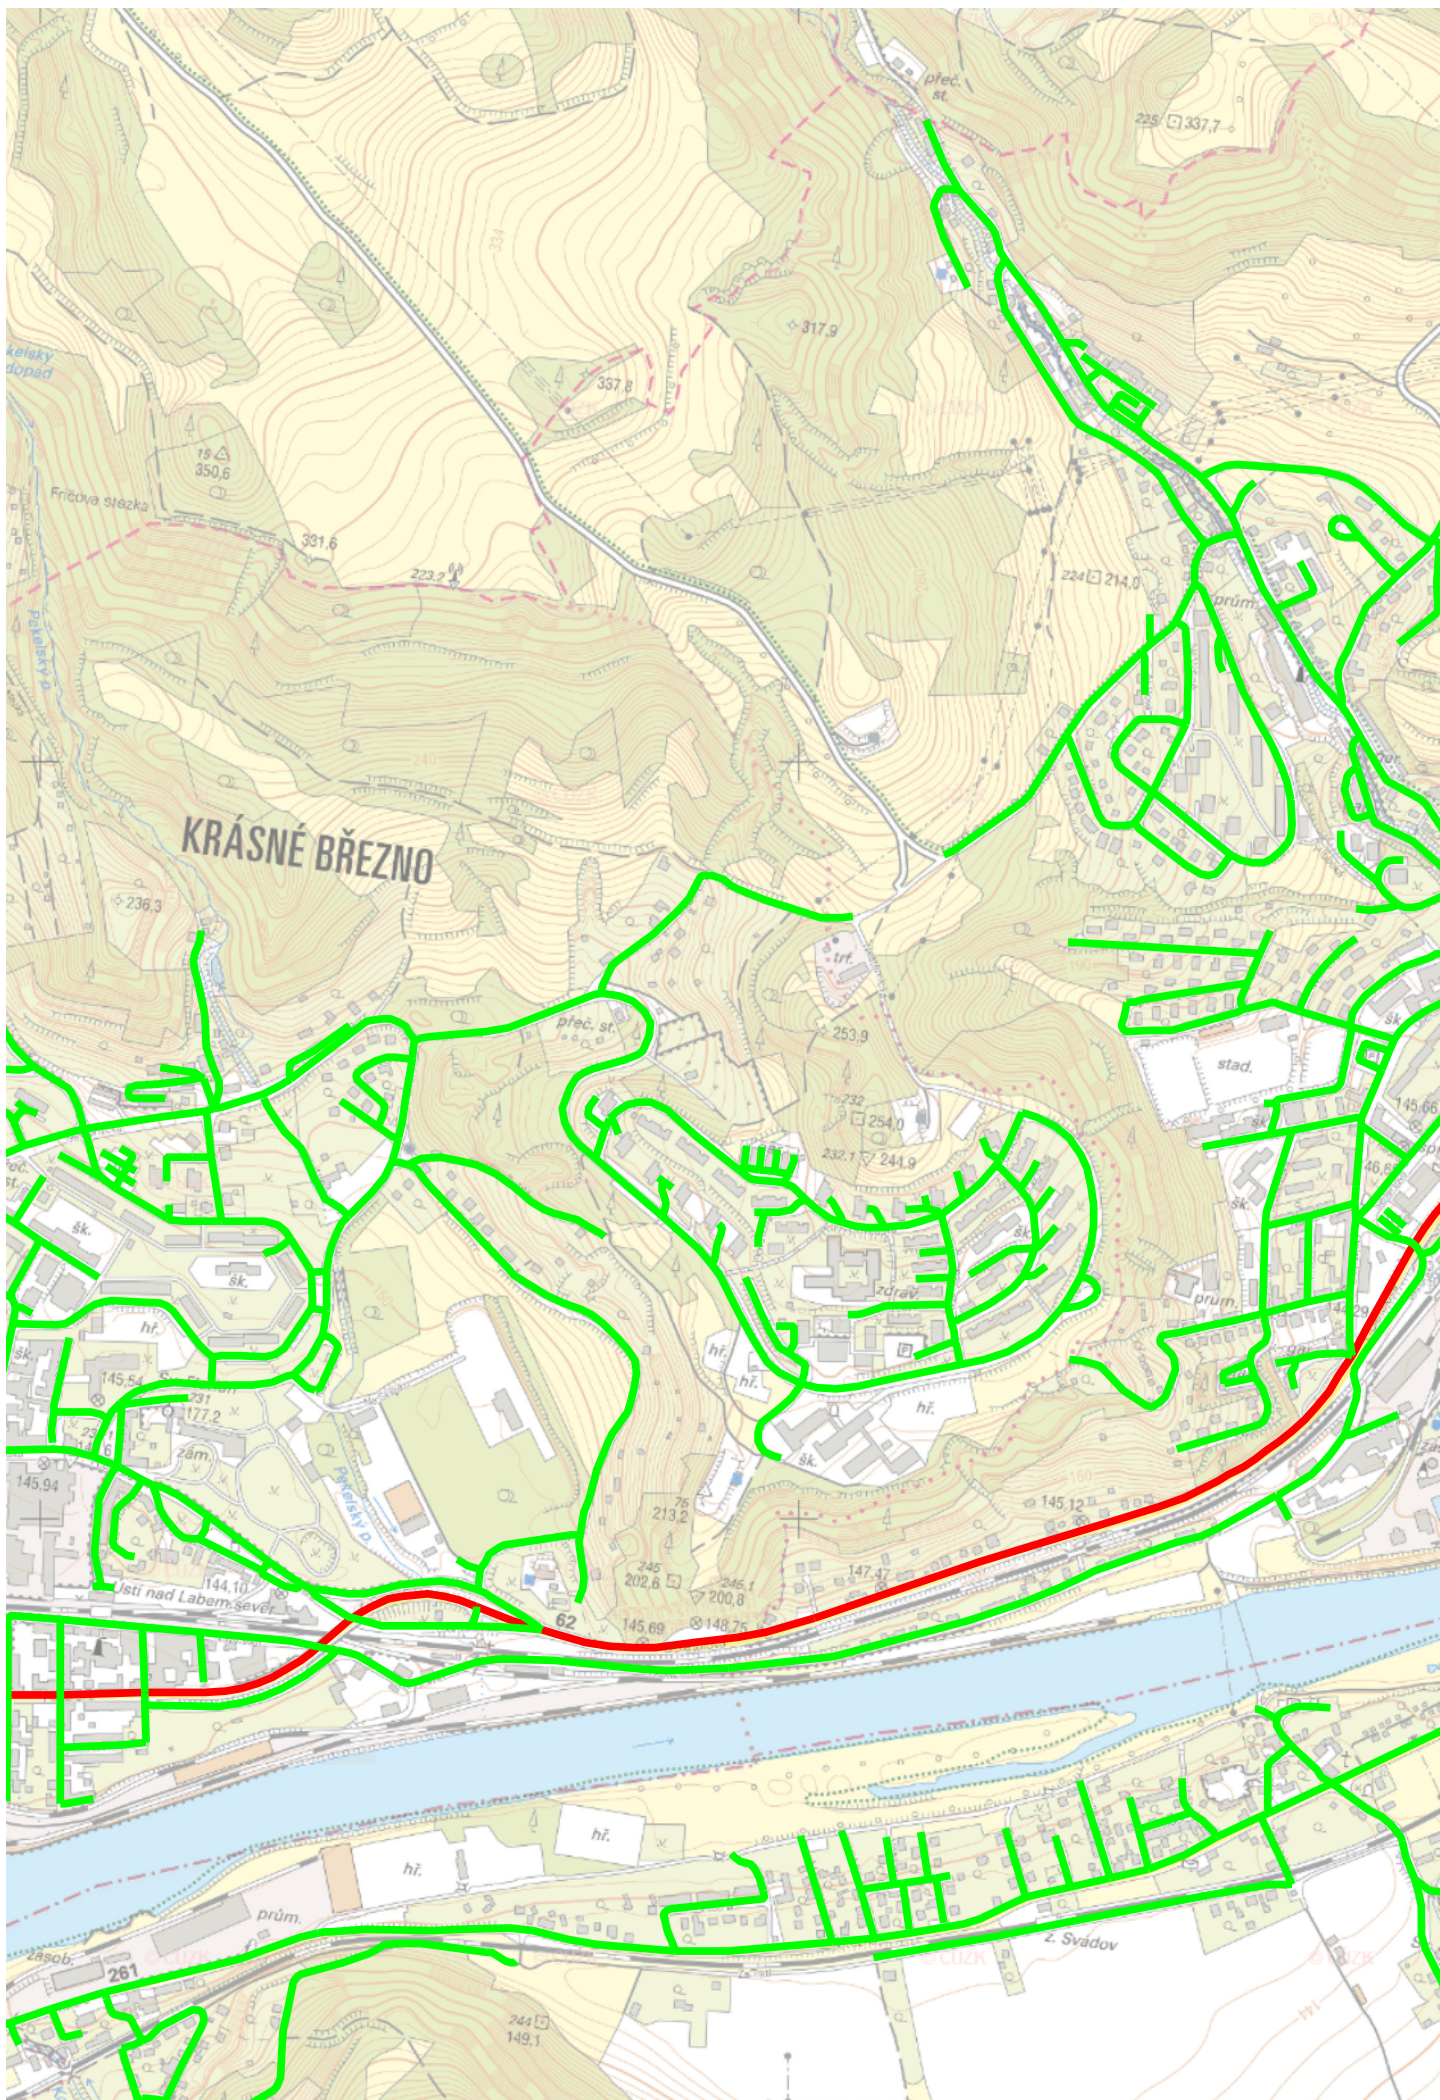

Měřítko 1 : 10000

100 0 100 200 300 400m

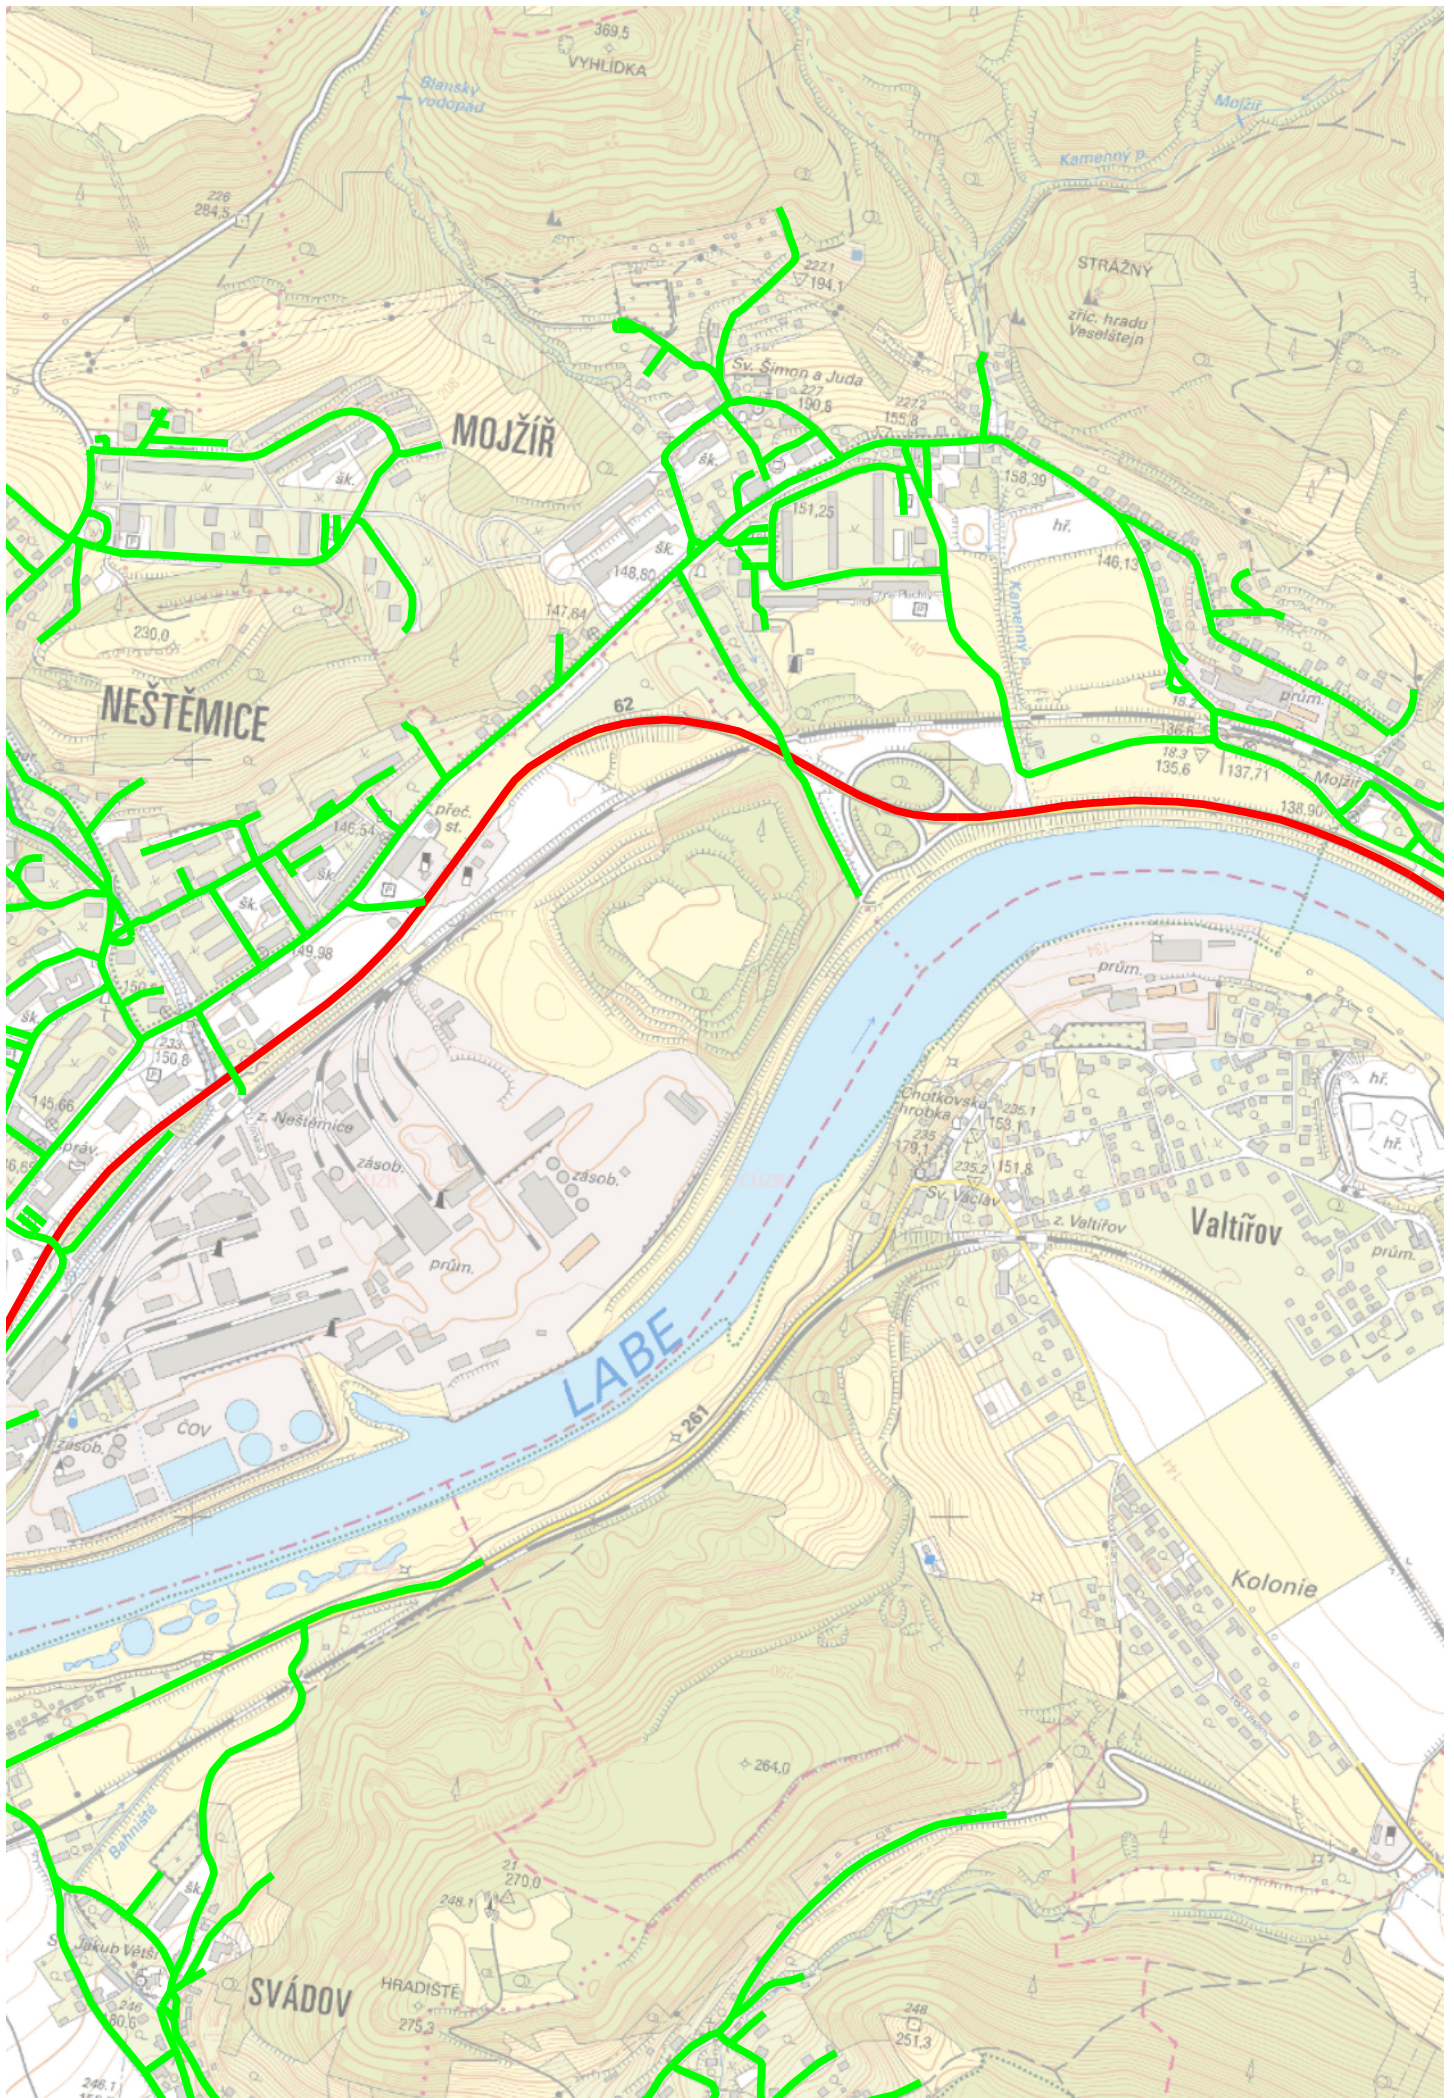


Měřítko 1 : 10000

100 0 100 200 300 400m




Měřítko 1 : 10000

100 0 100 200 300 400m

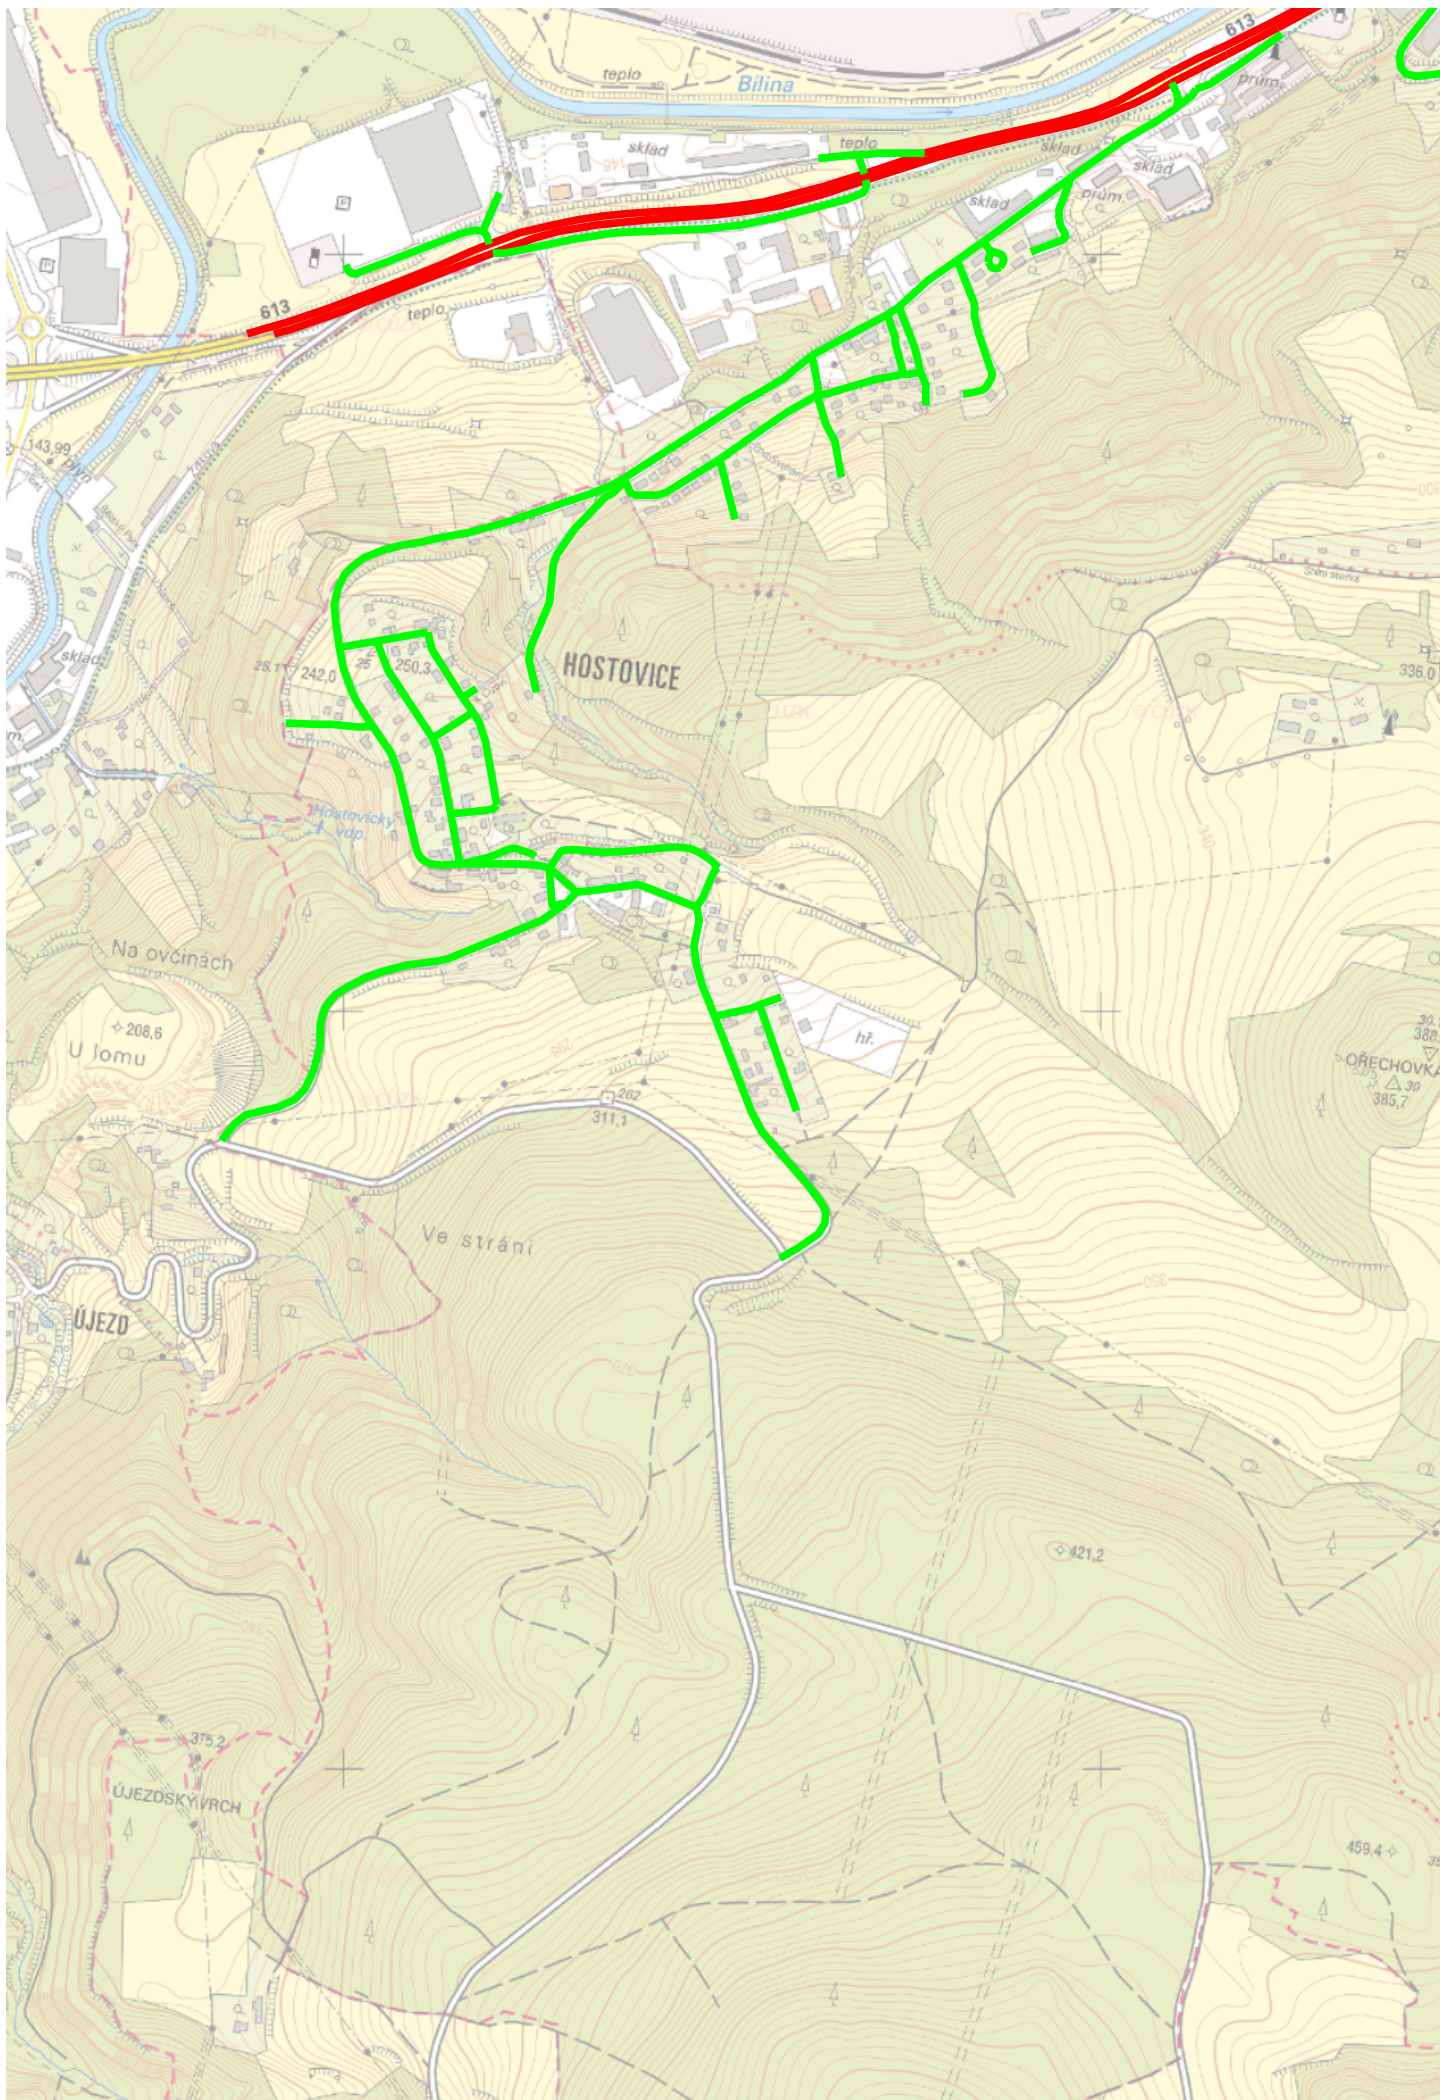


Měřítko 1 : 10000

100 0 100 200 300 400m

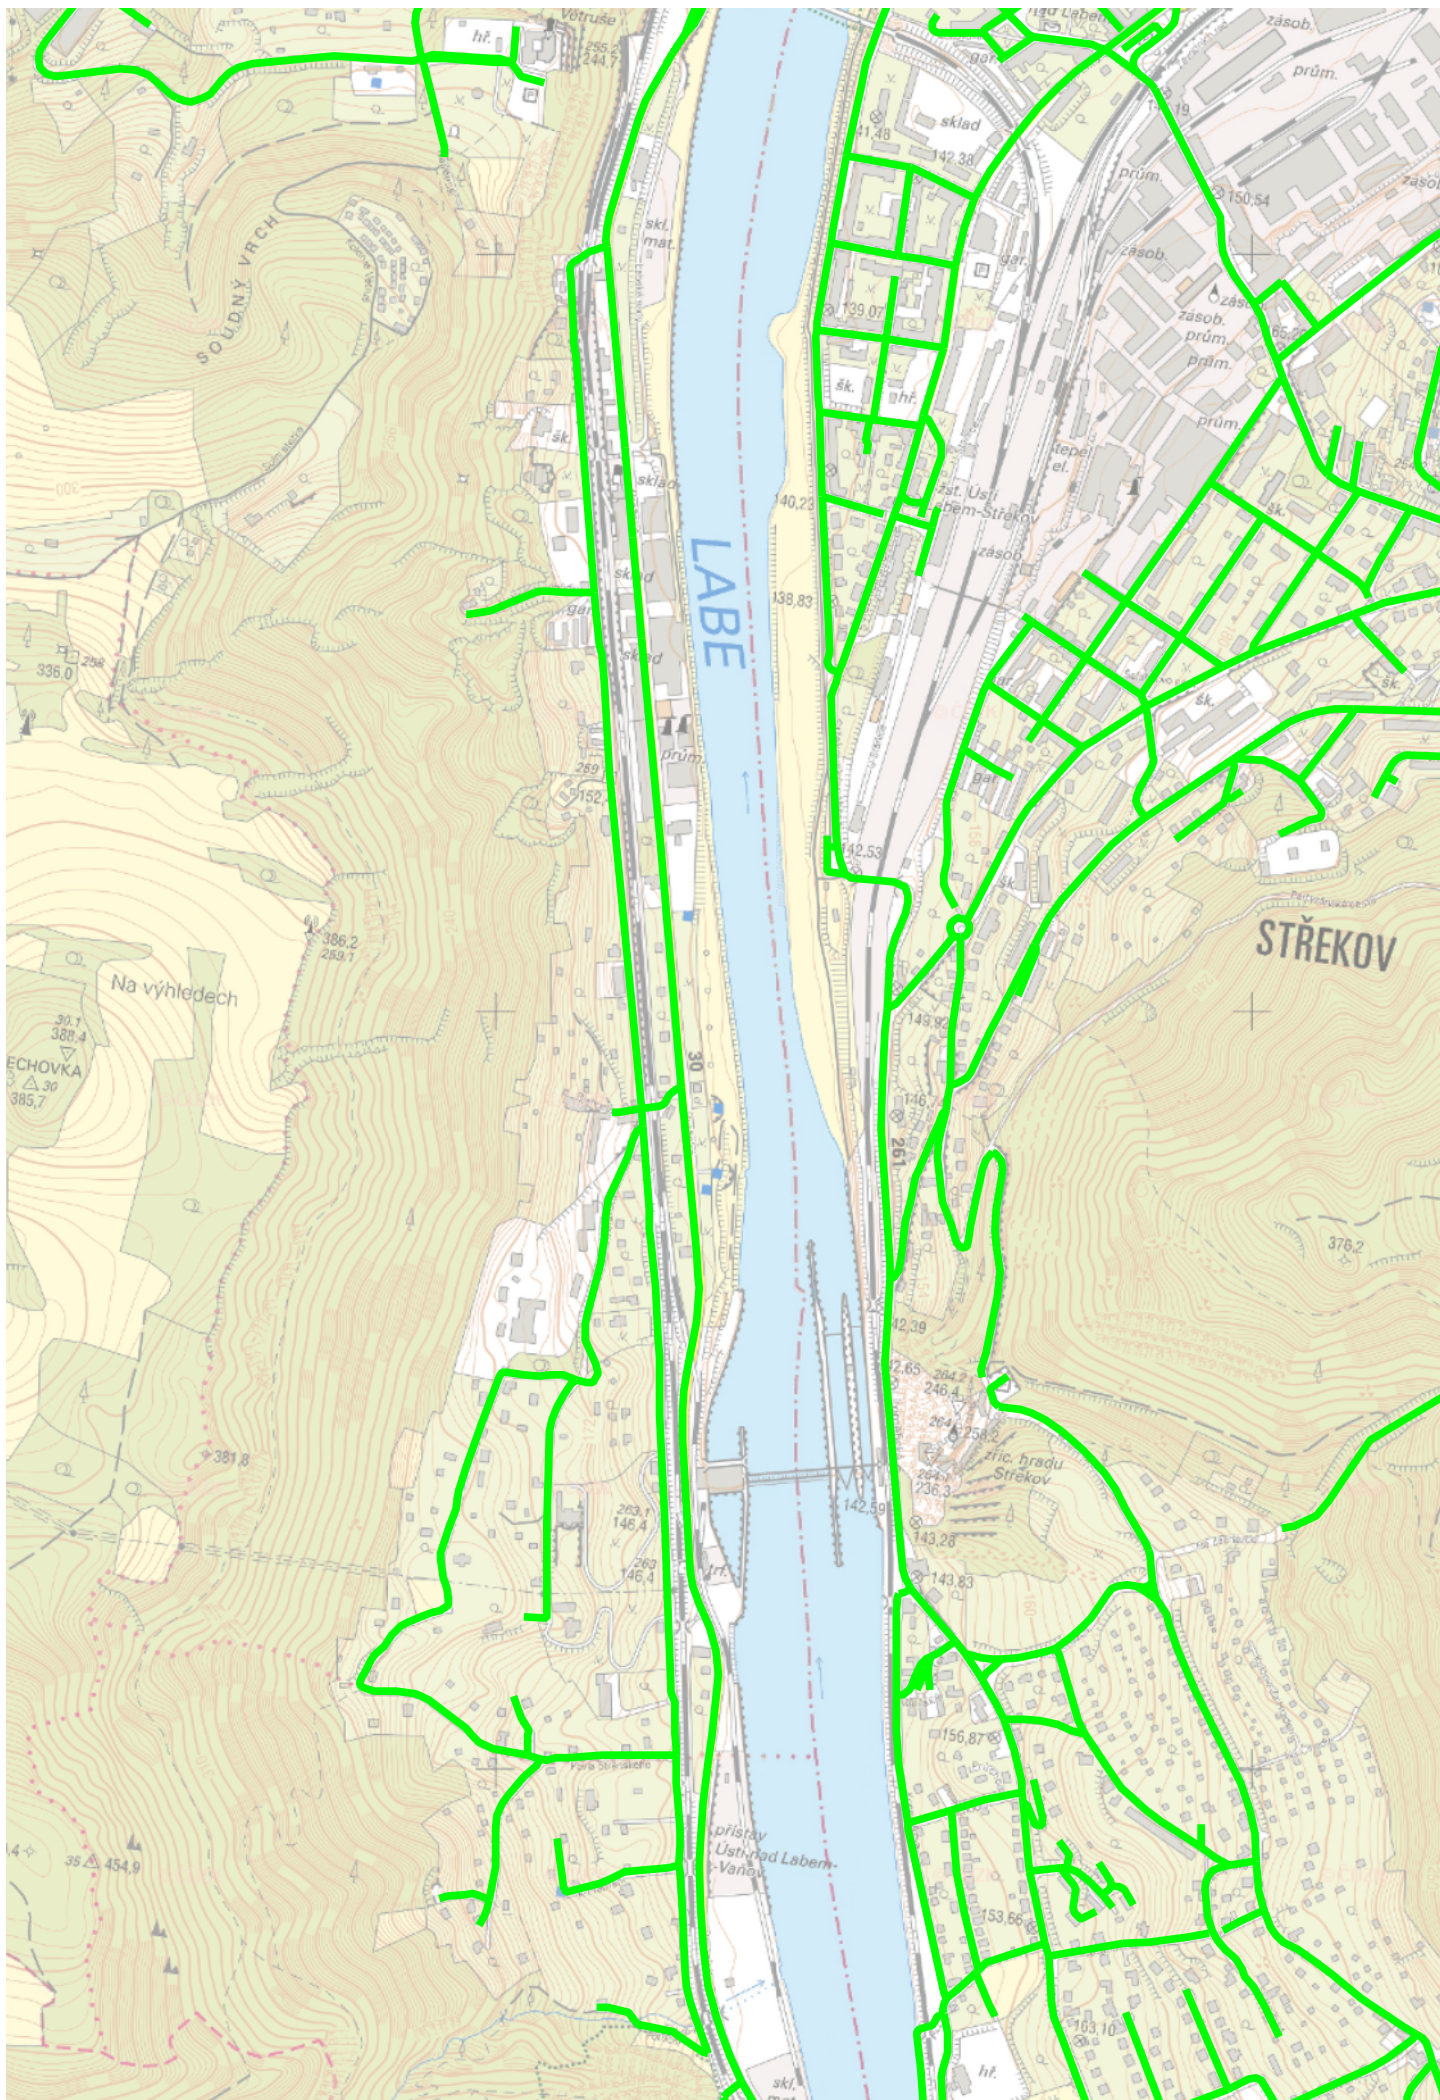


Měřítko 1 : 10000


100 0 100 200 300 400m

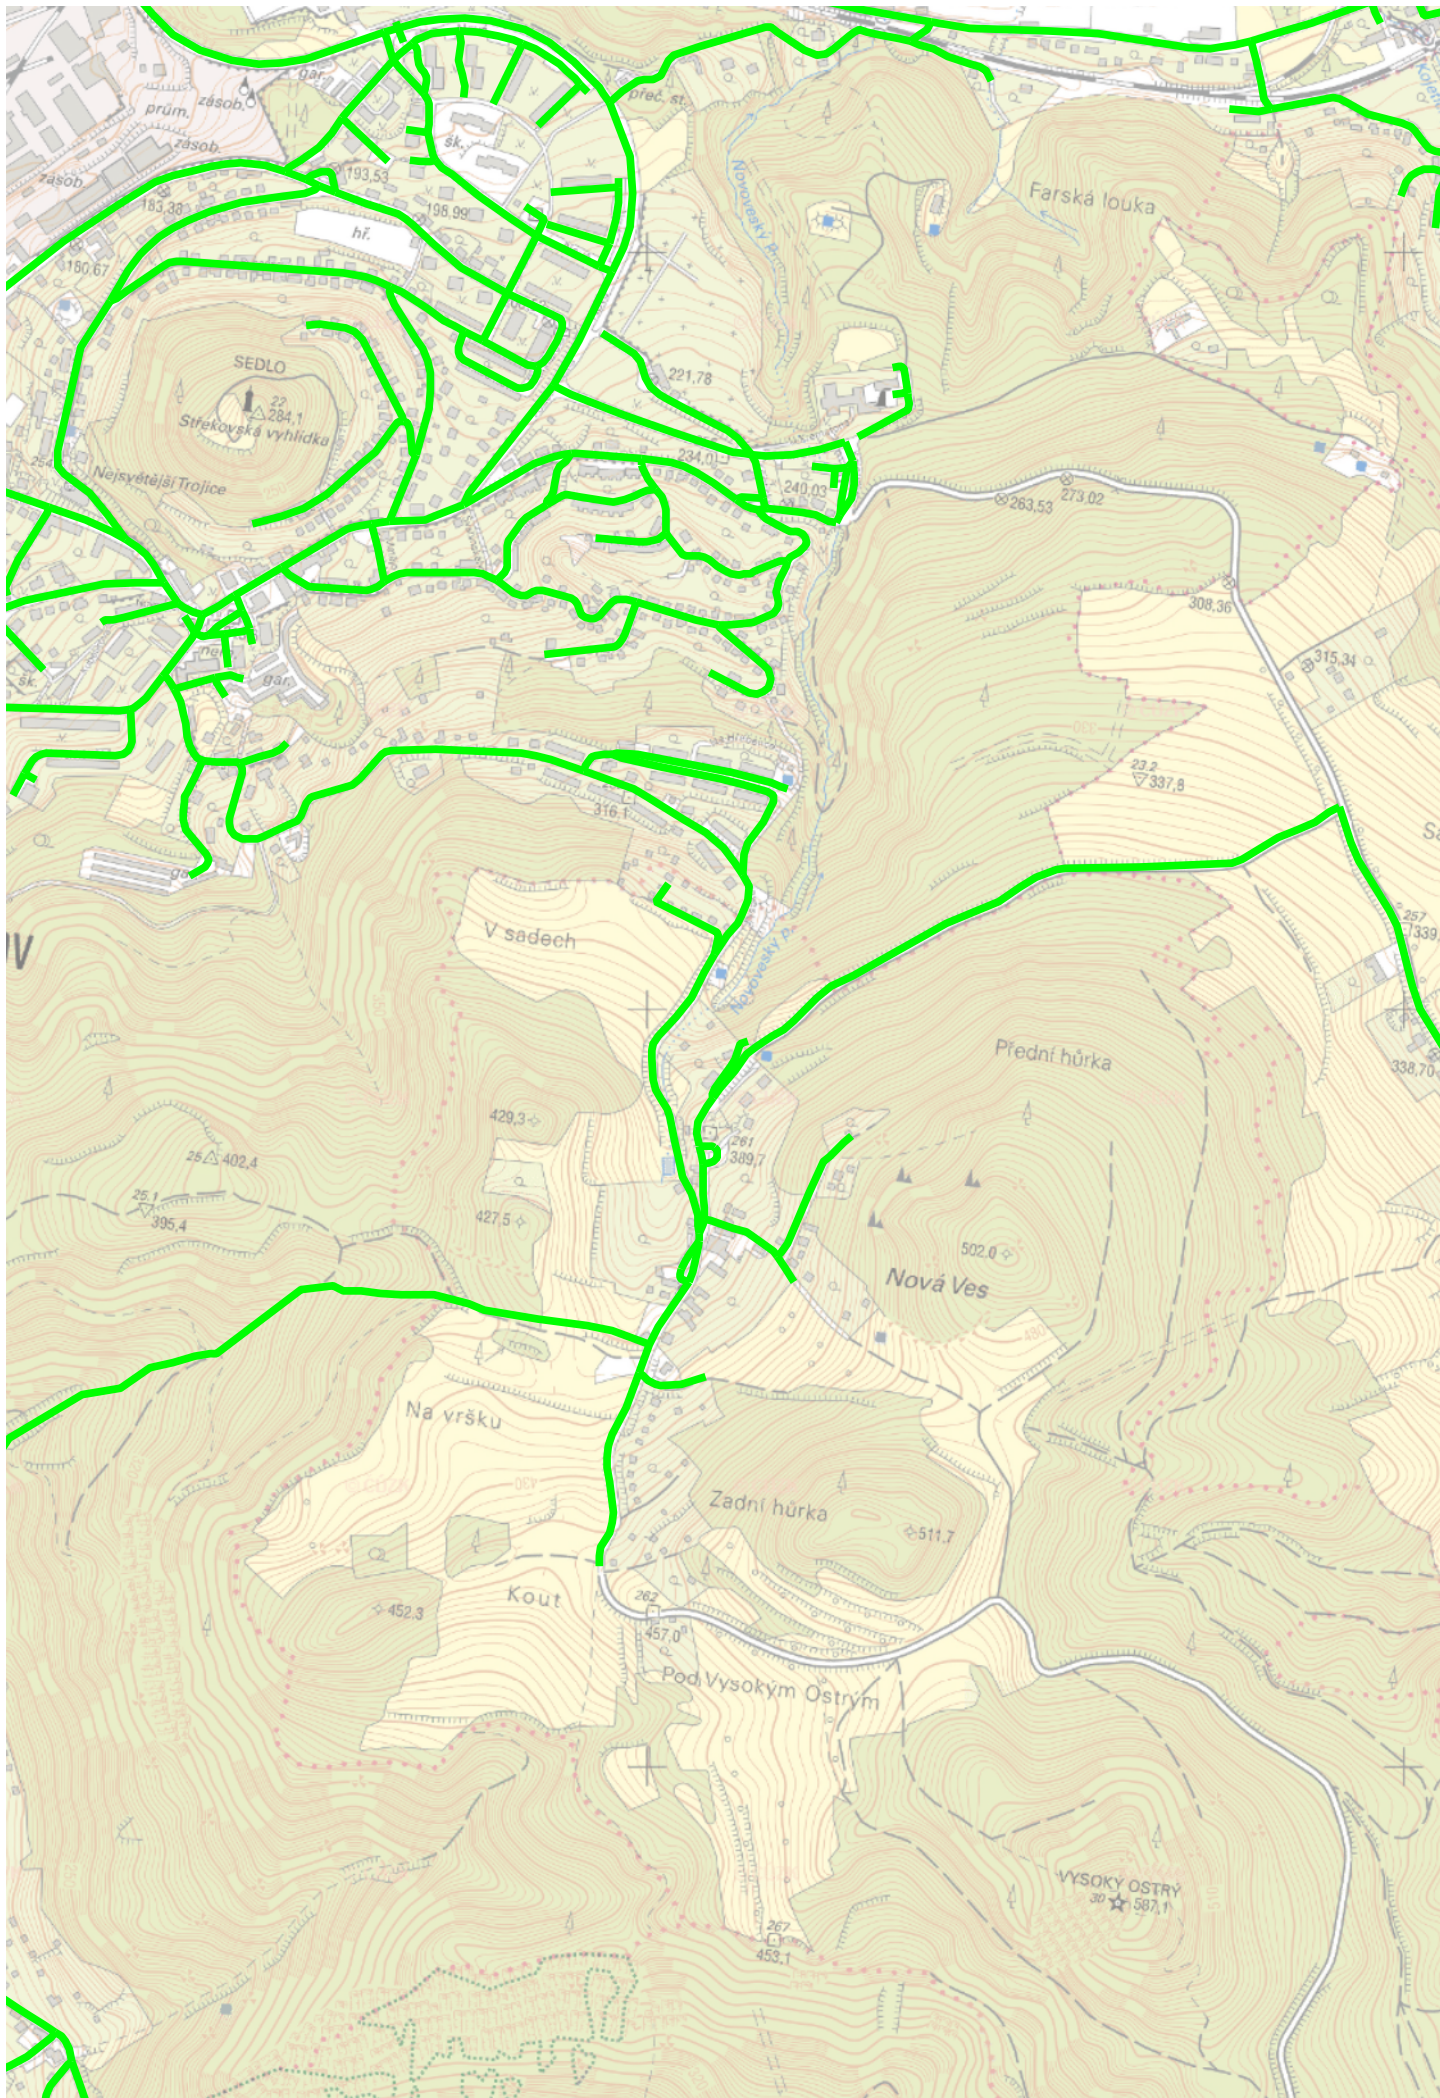

Měřítko 1 : 10000


100 0 100 200 300 400m

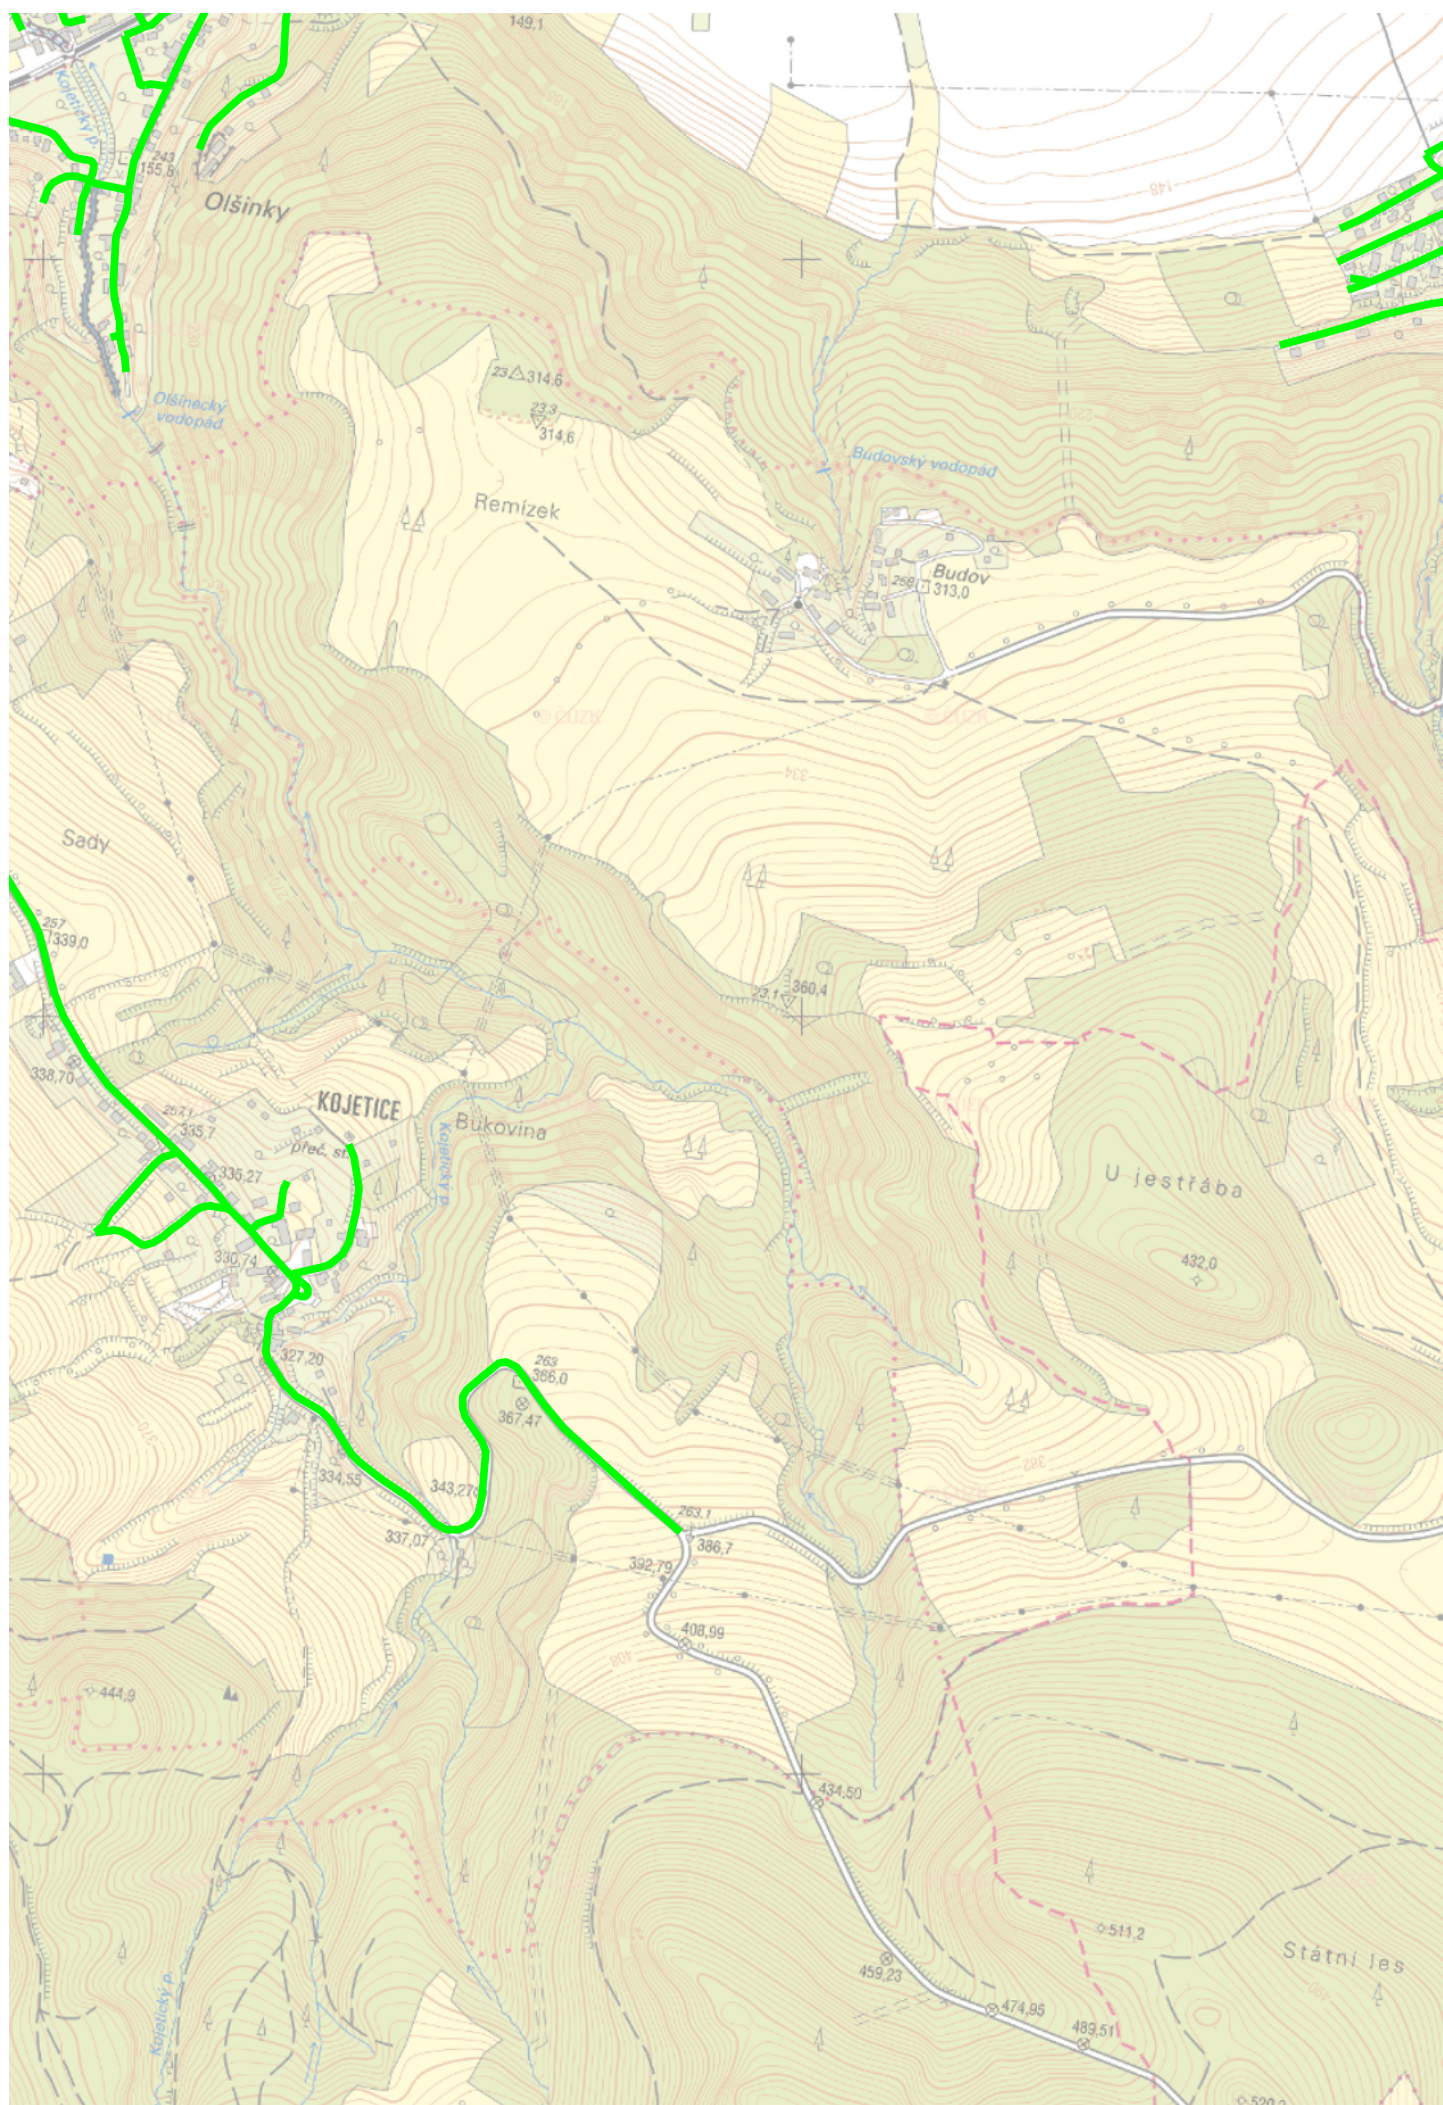

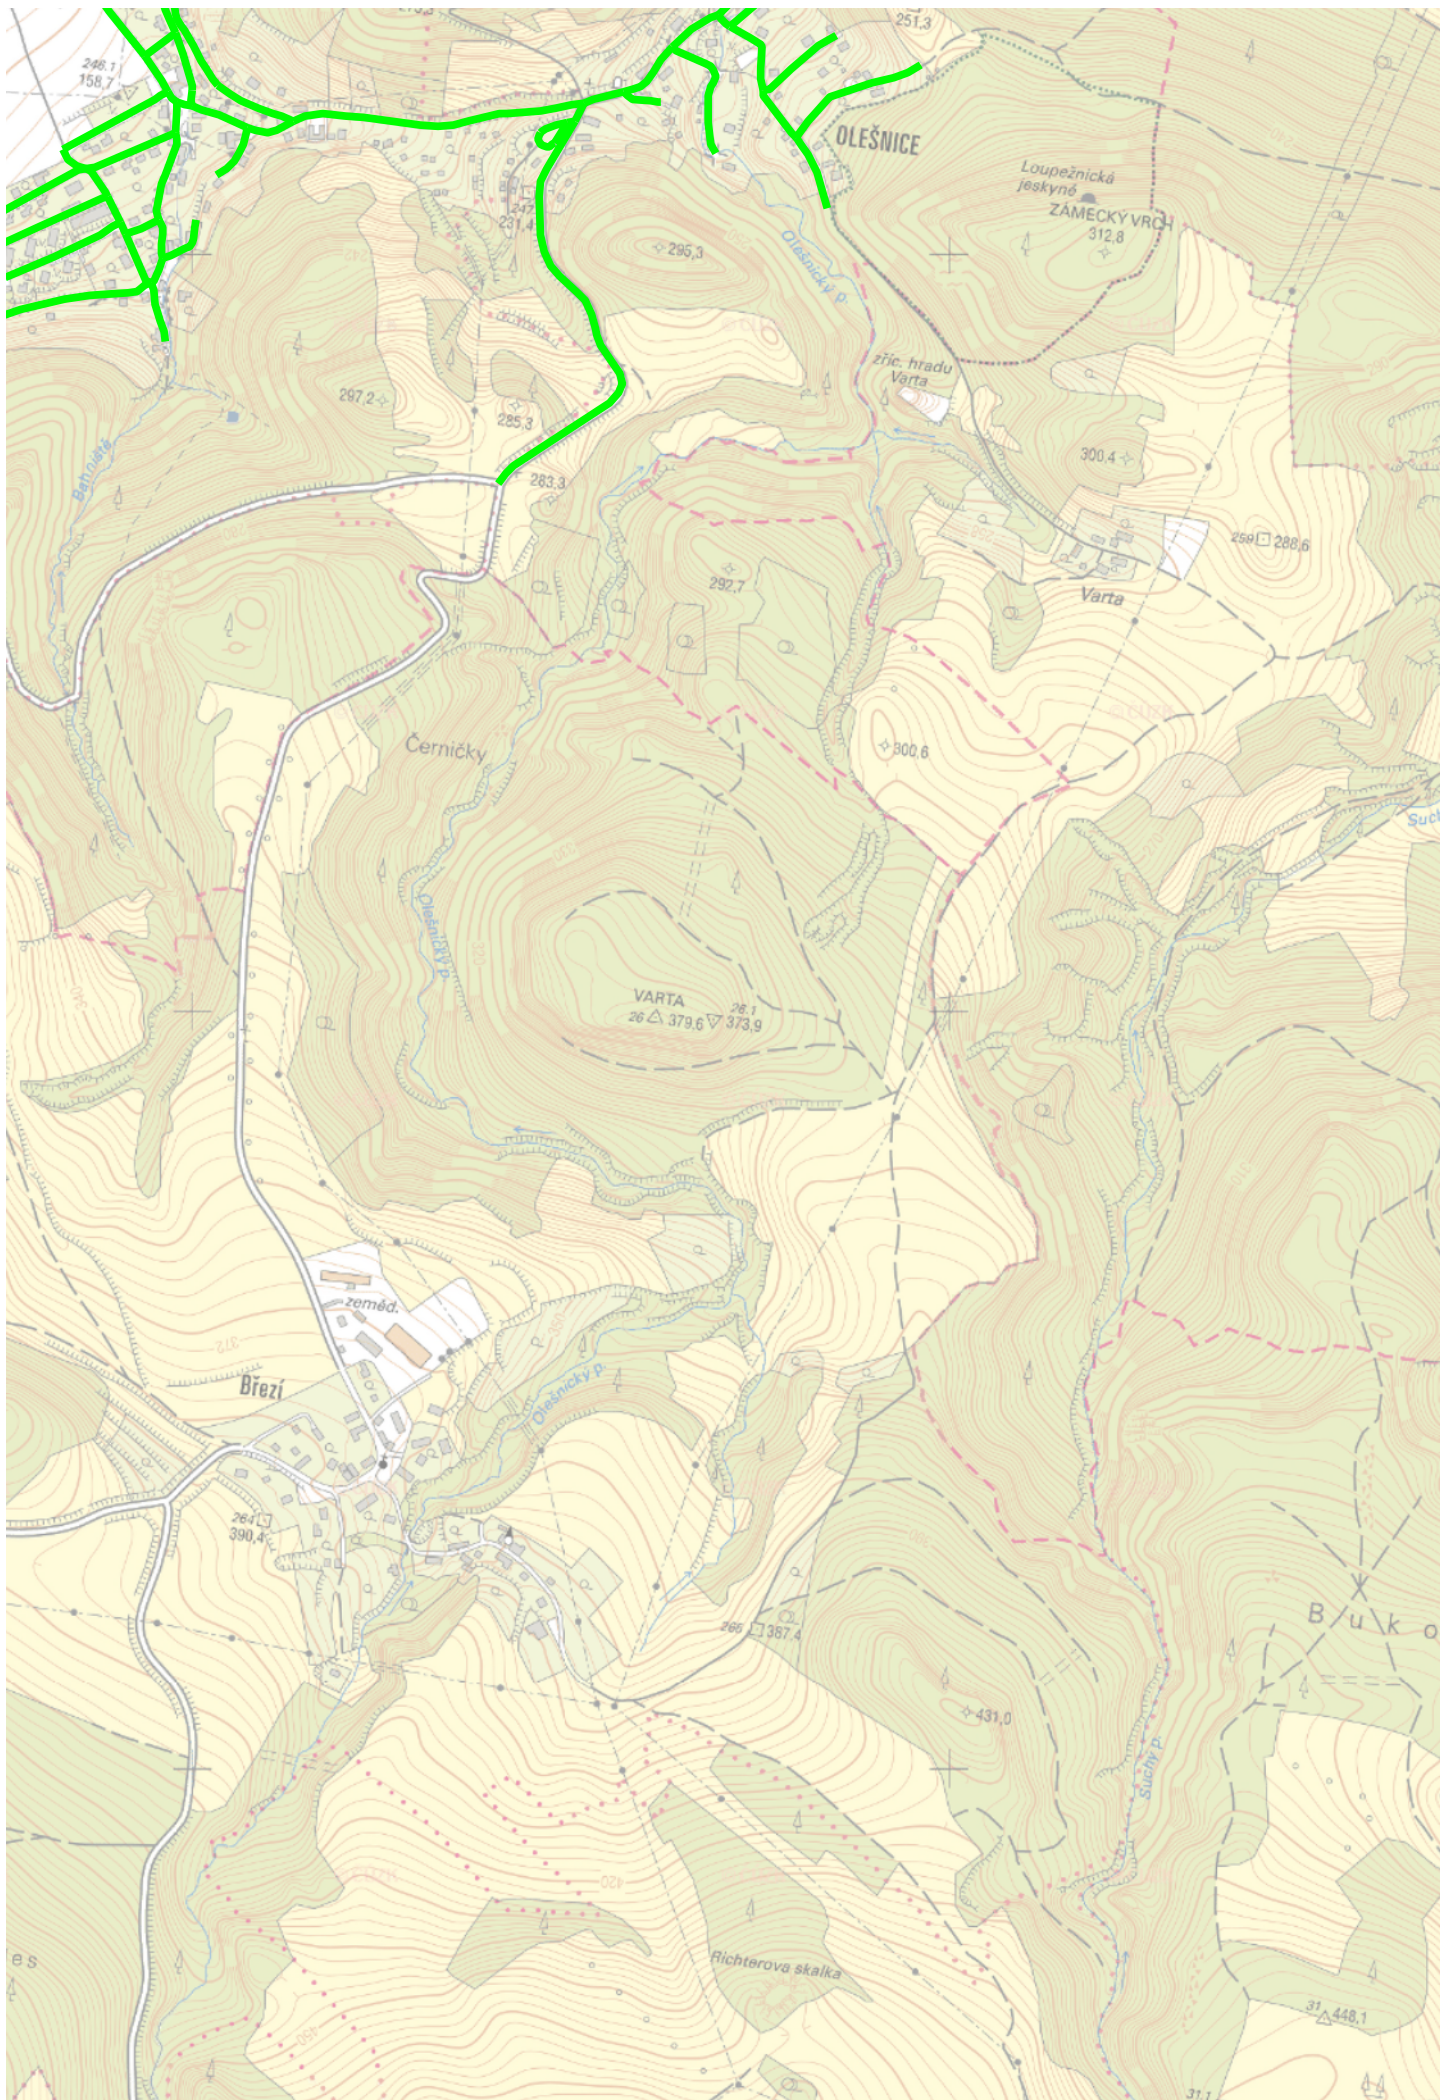


Měřítko 1 : 10000


100 0 100 200 300 400m

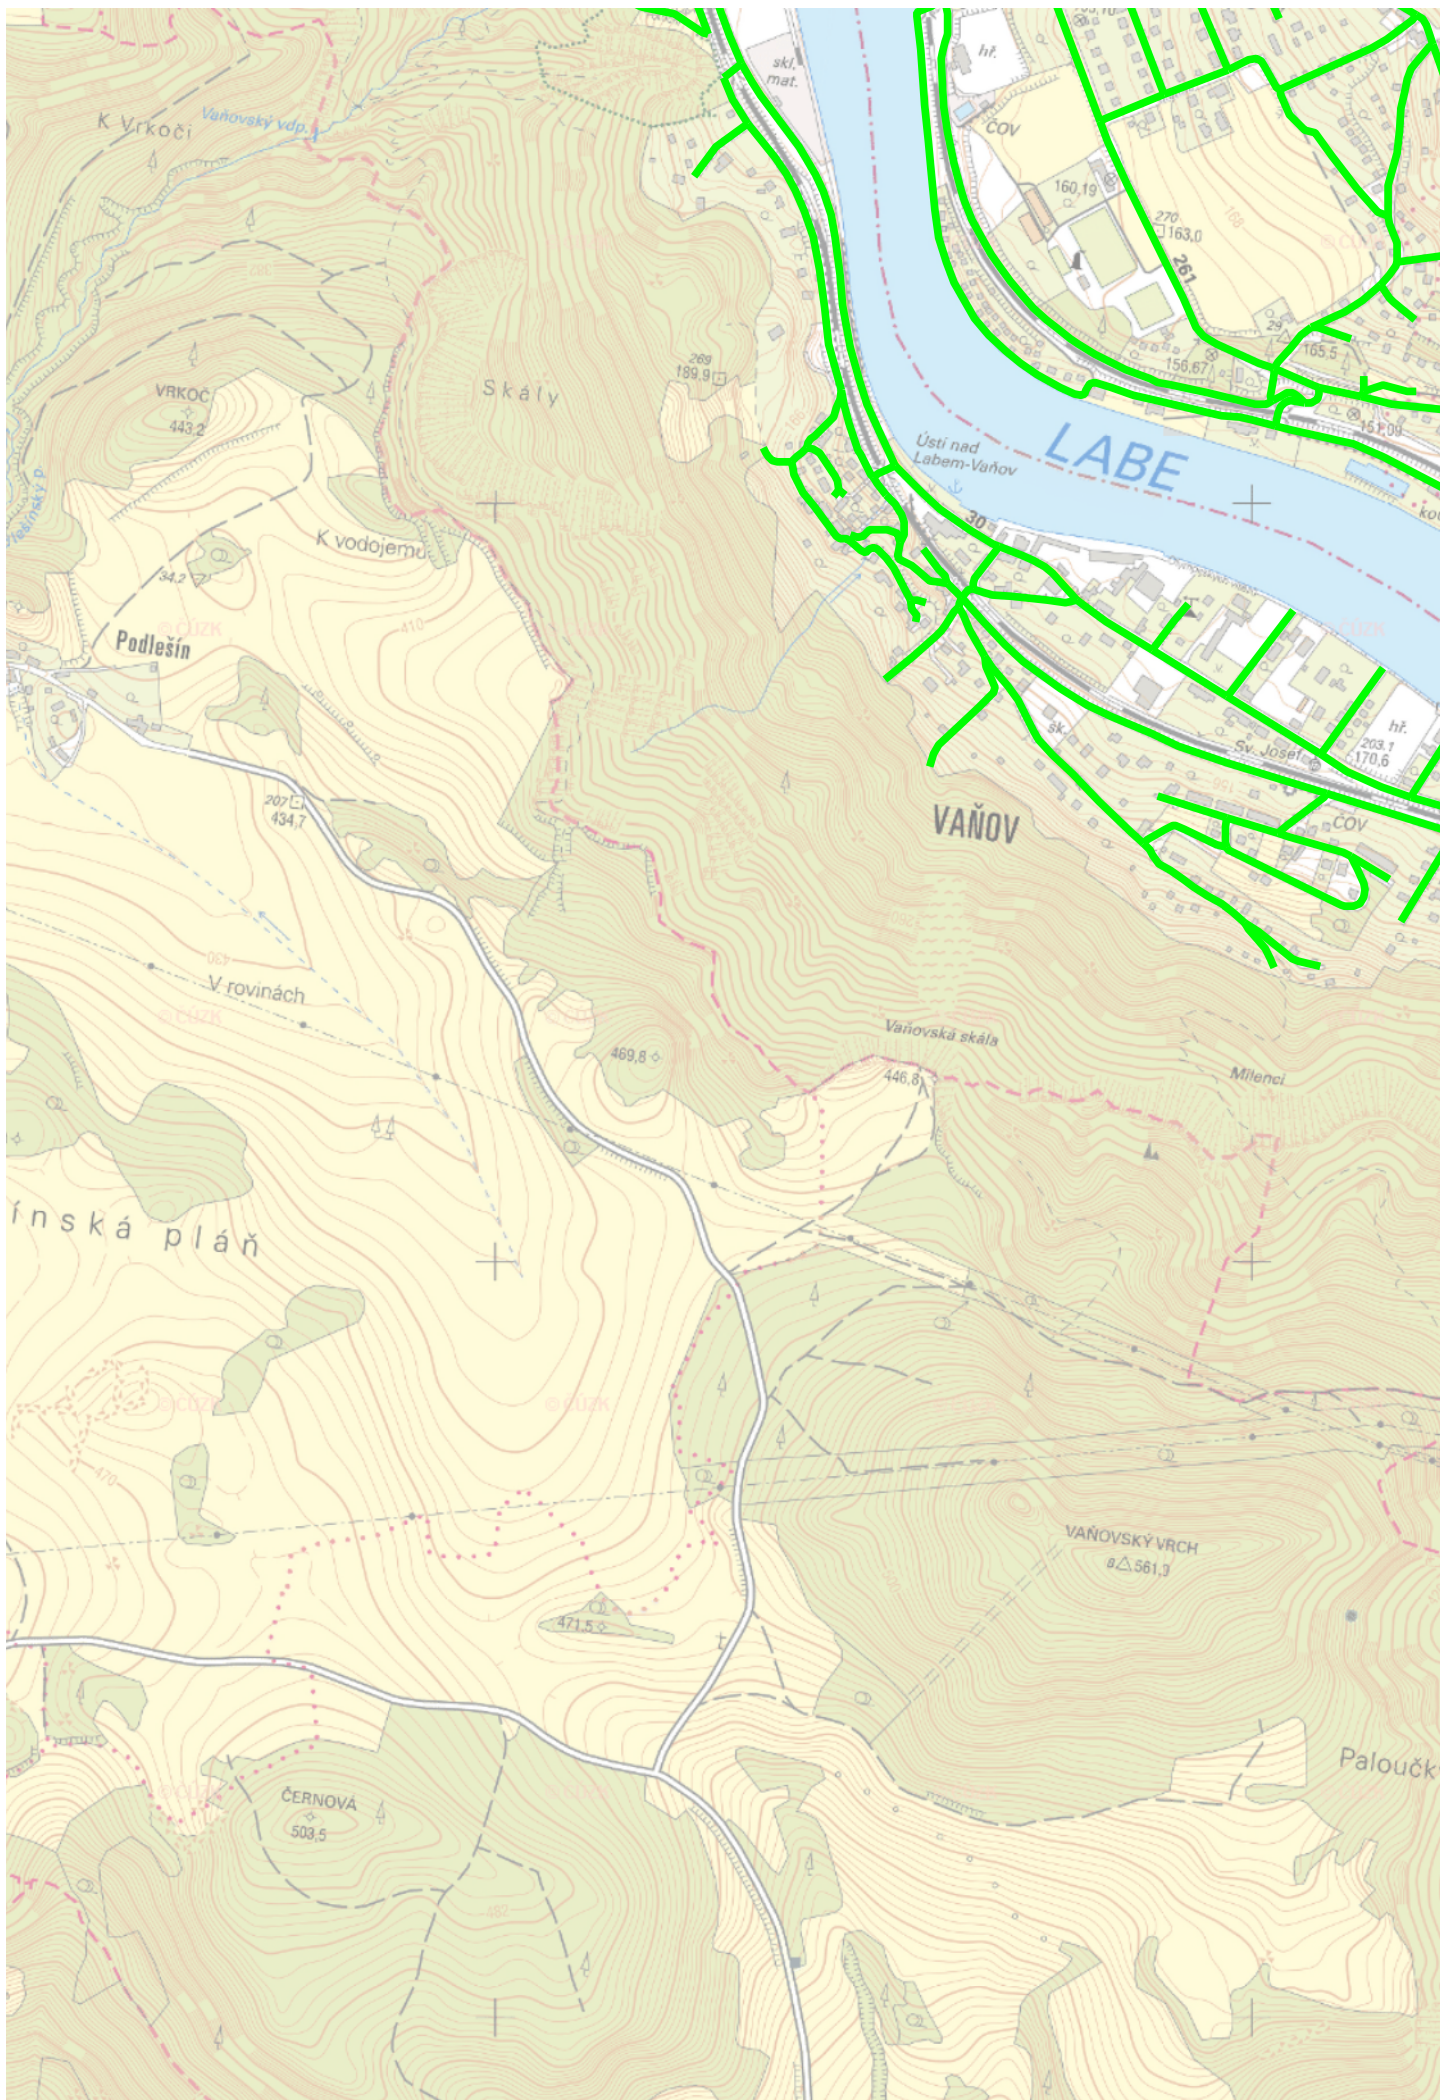

Měřítko 1 : 10000


100 0 100 200 300 400m

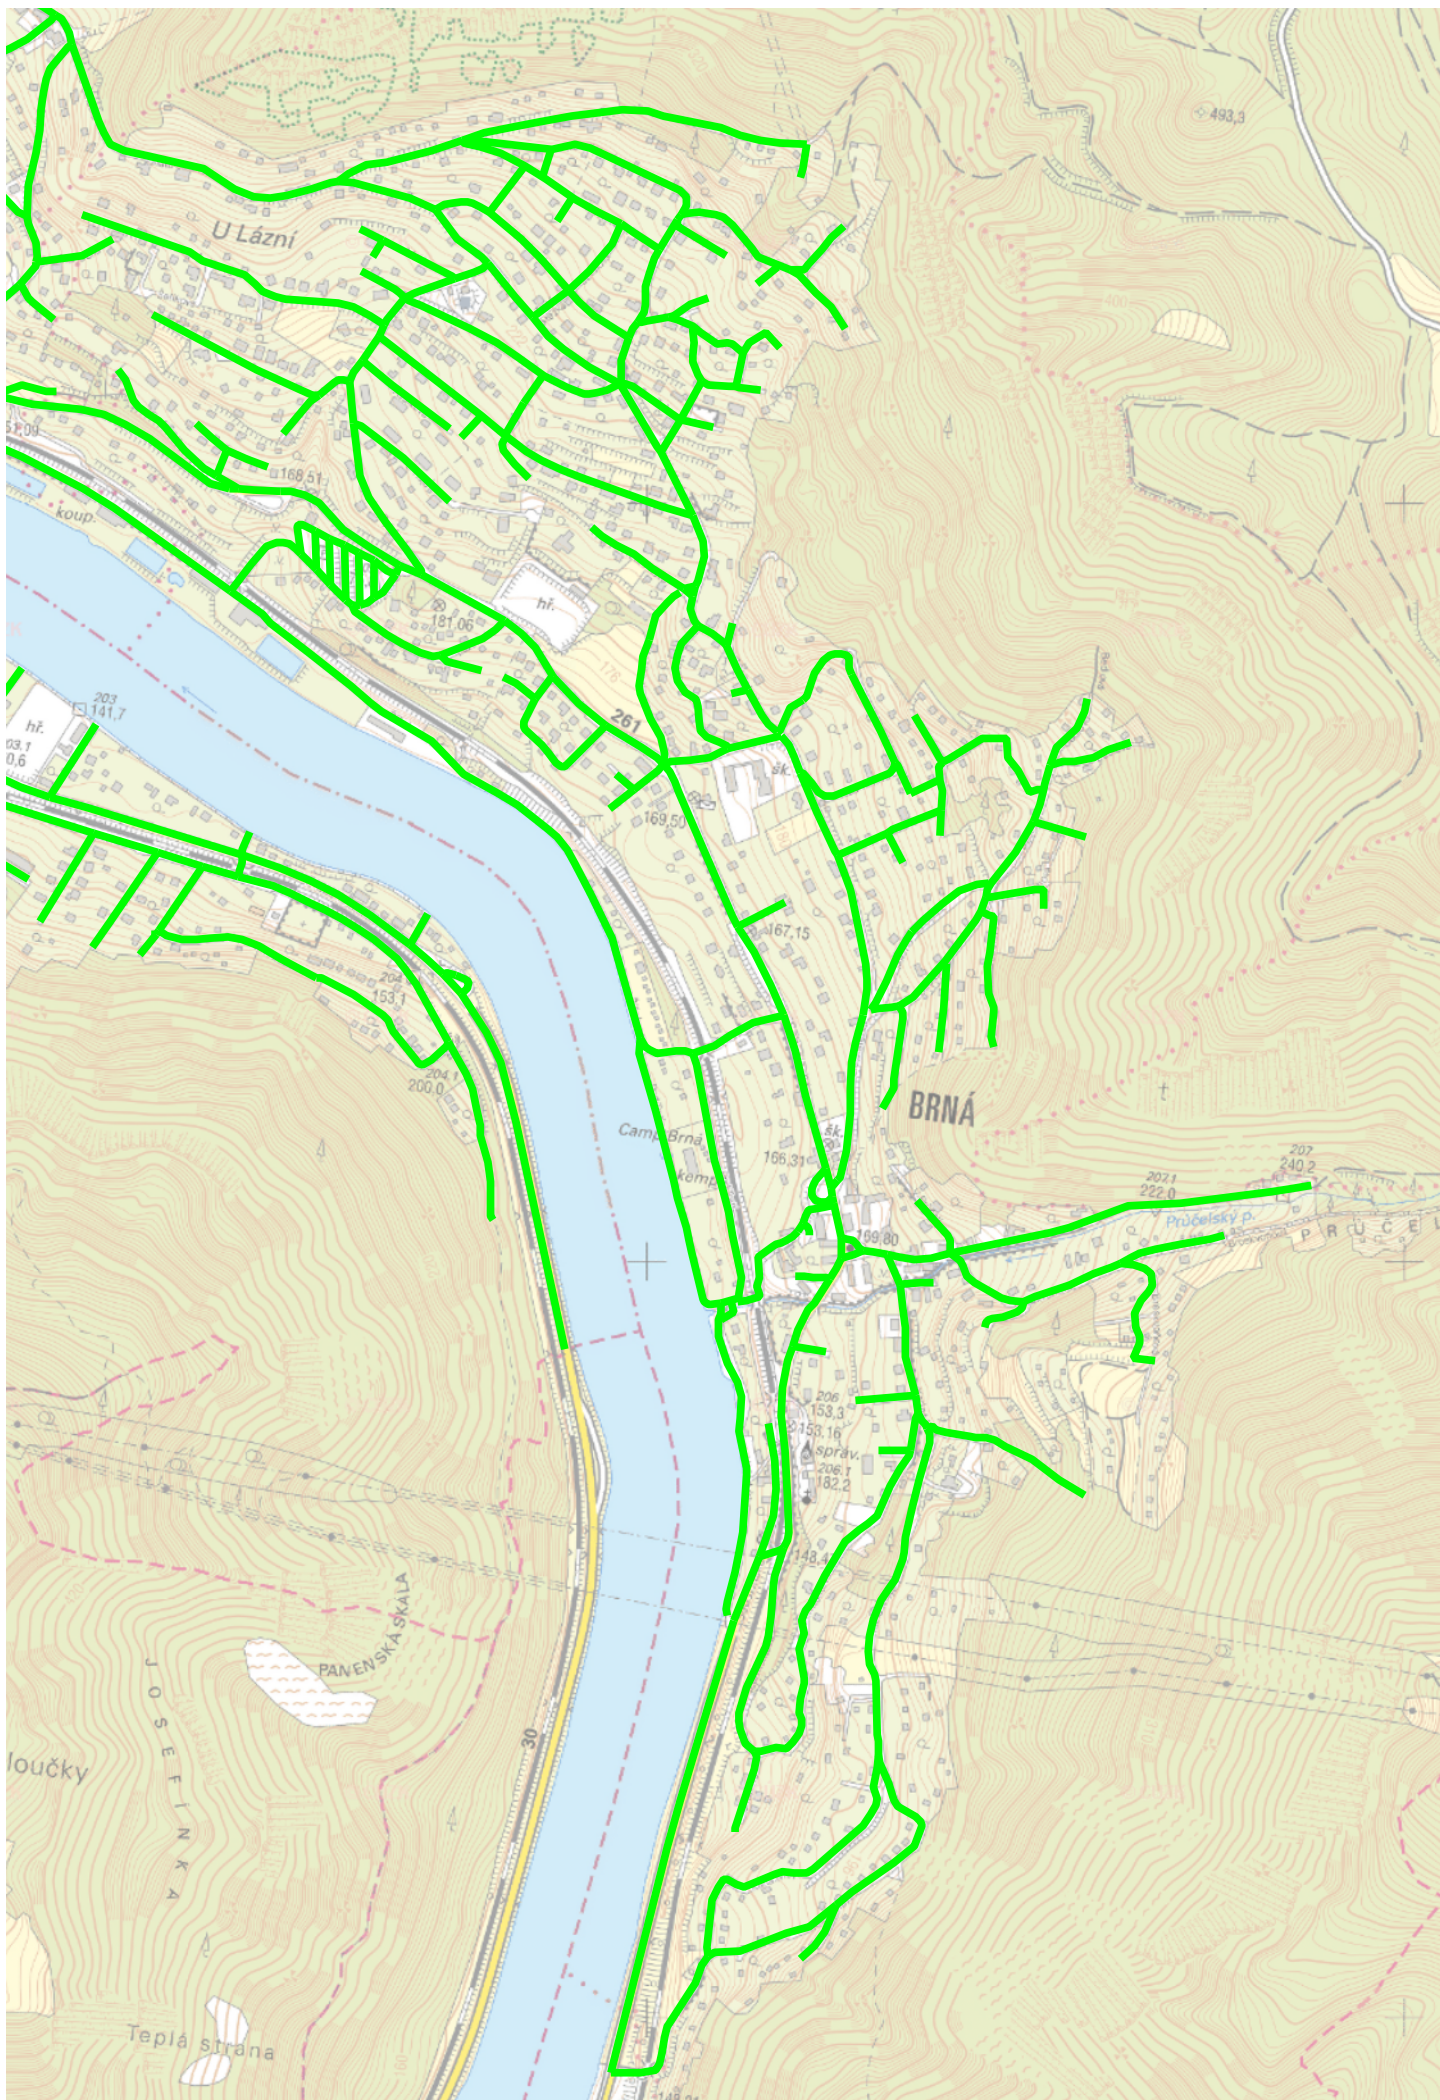

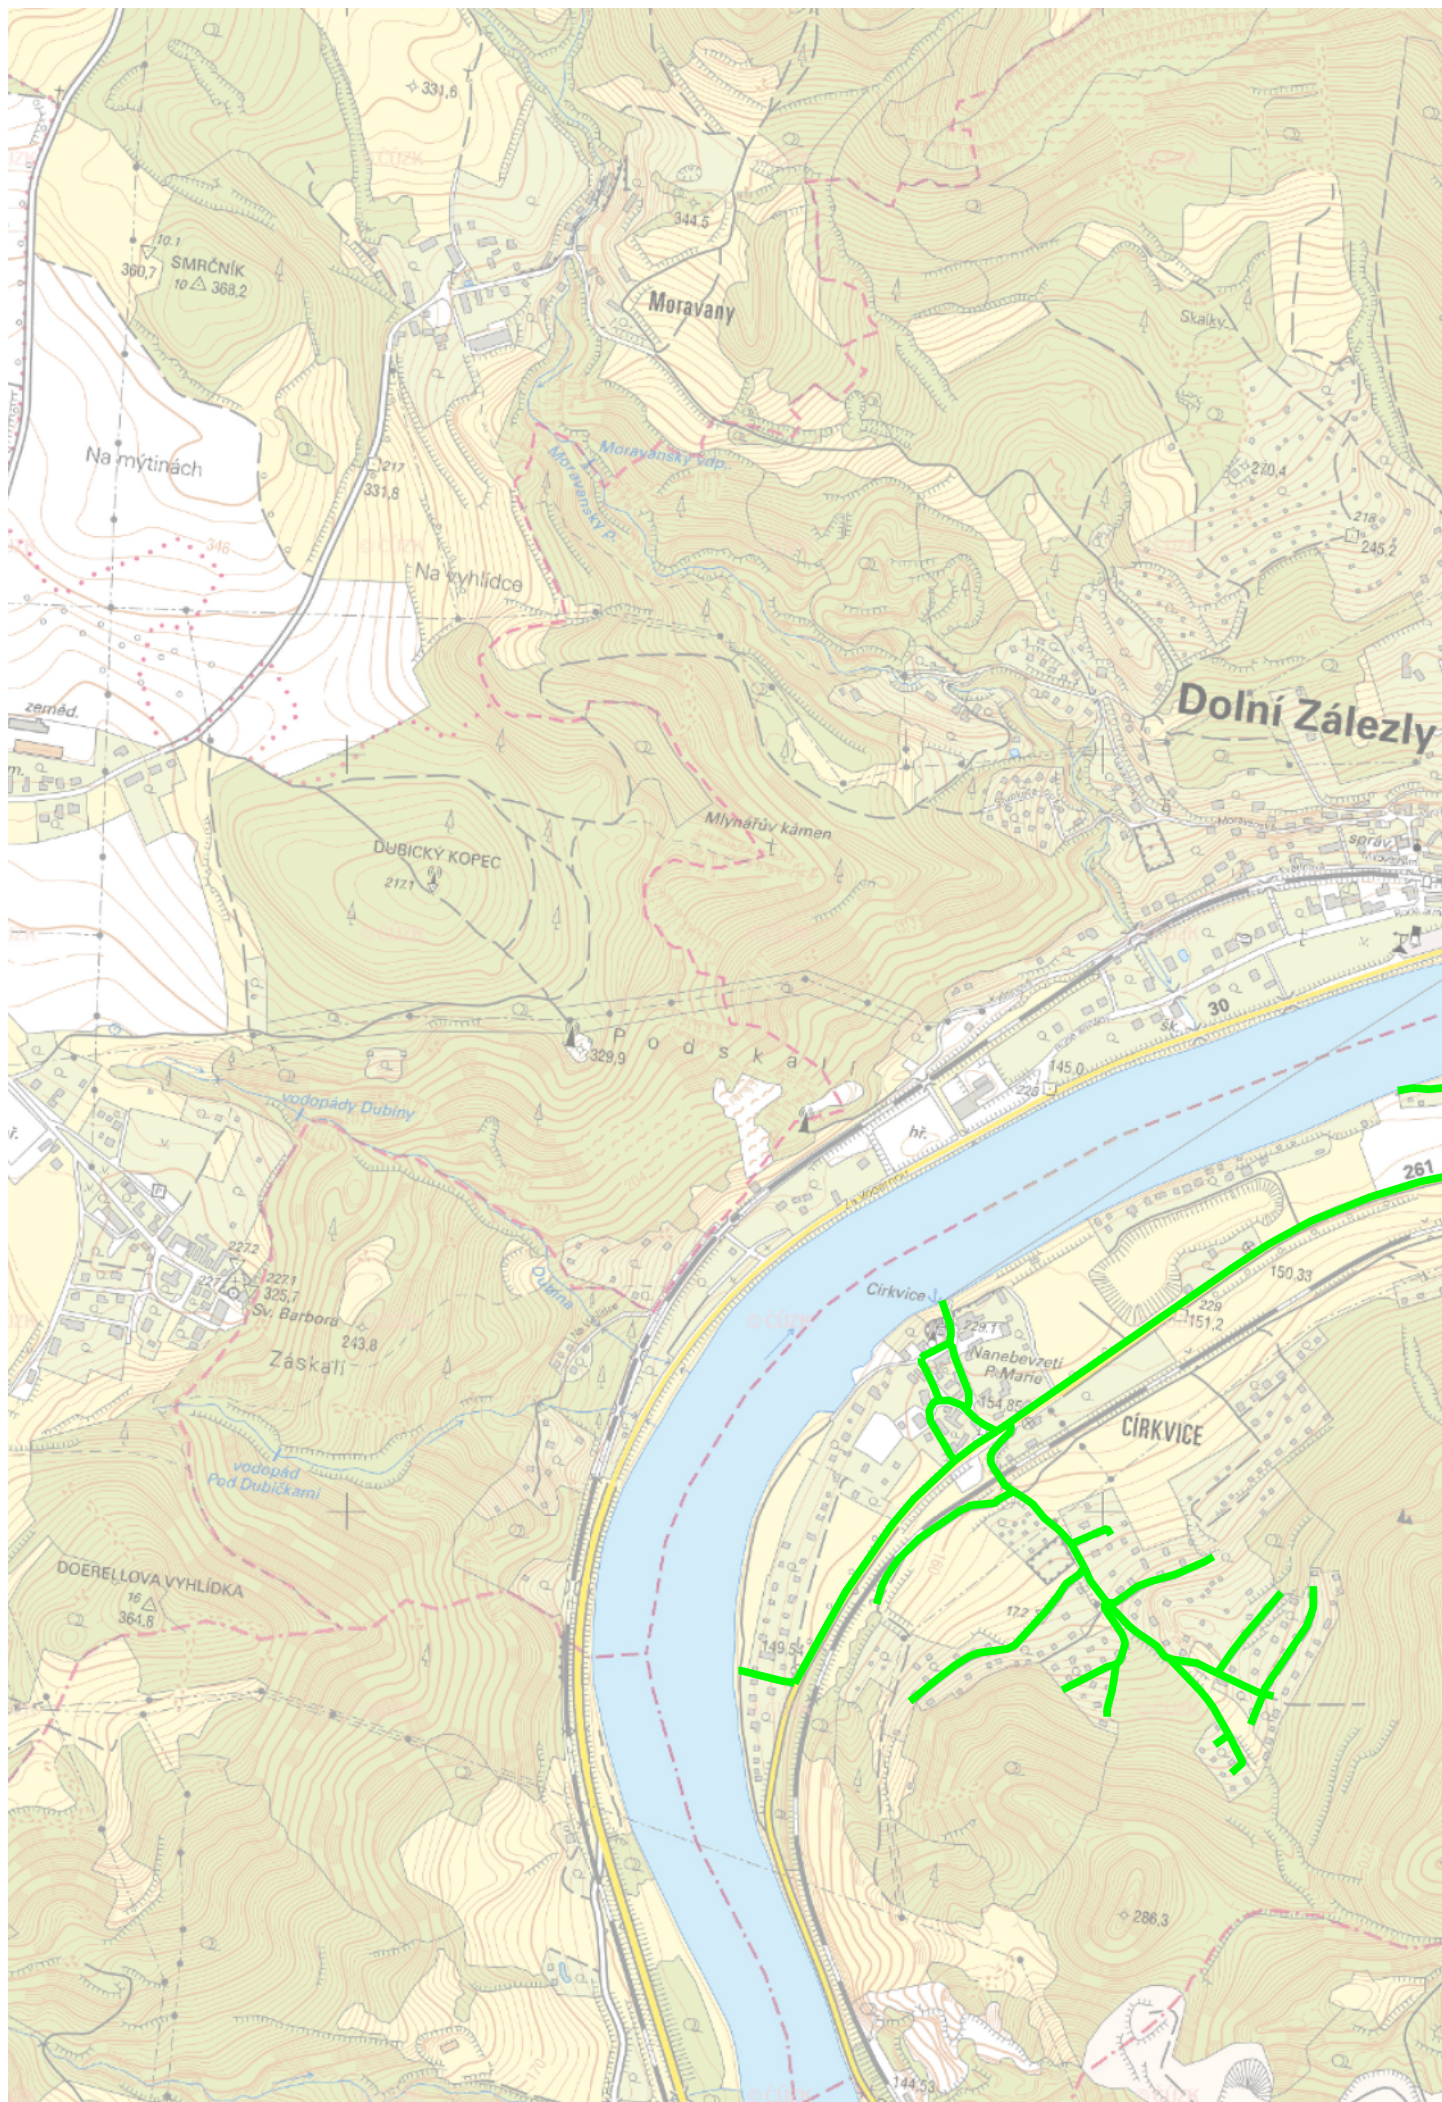


Měřítko 1 : 10000

100 0 100 200 300 400m

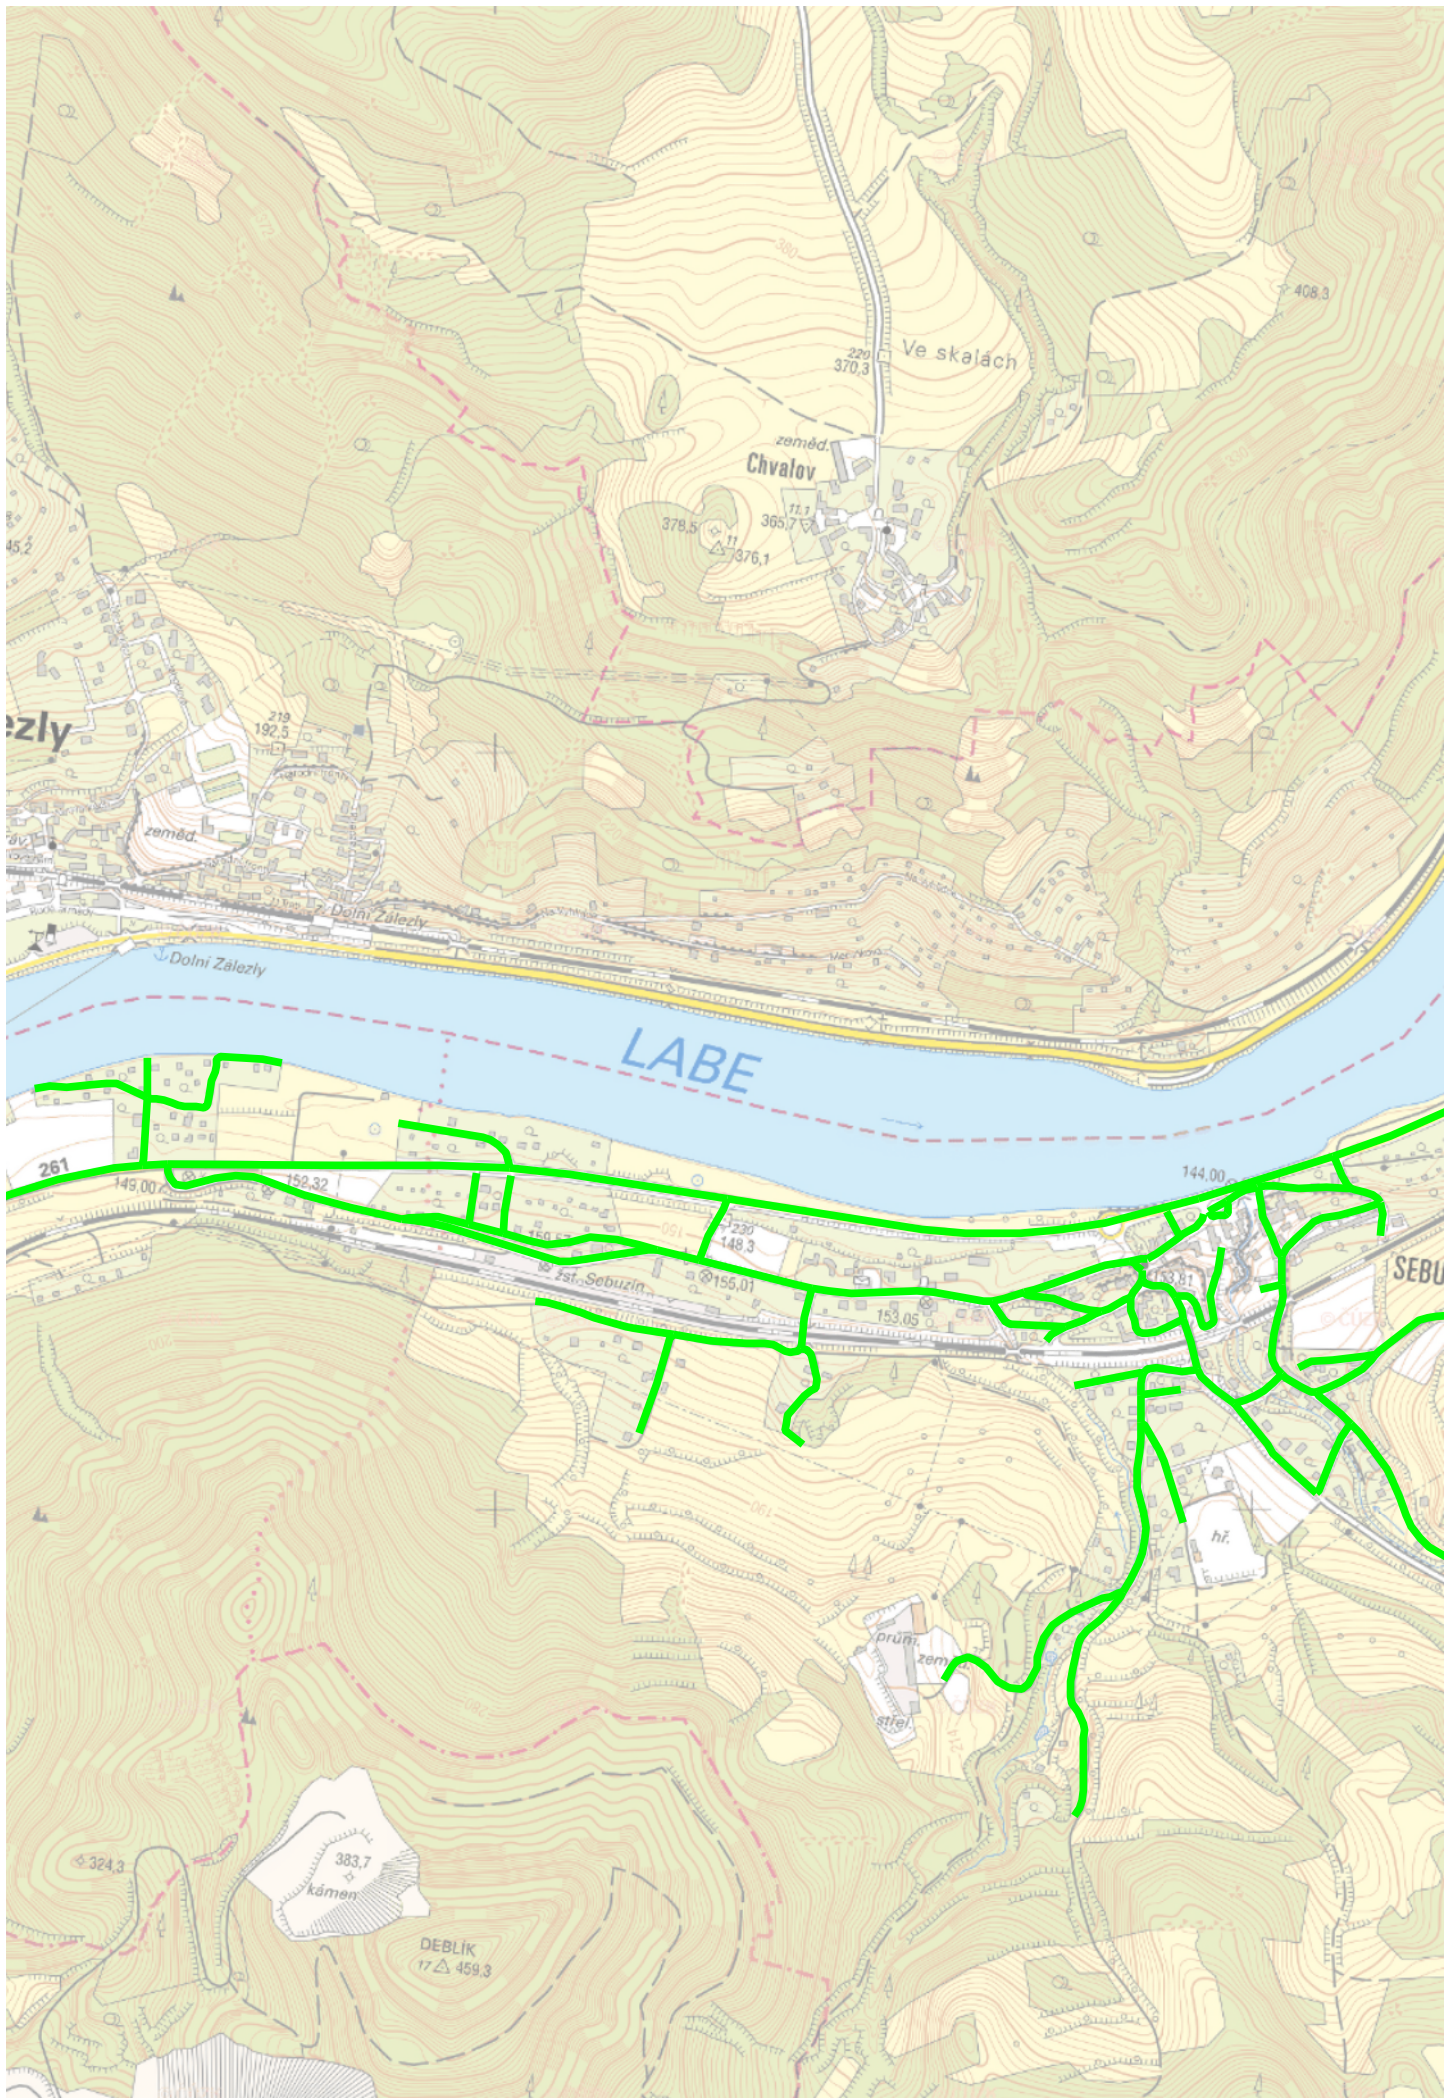

Měřítko 1 : 10000

100 0 100 200 300 400m

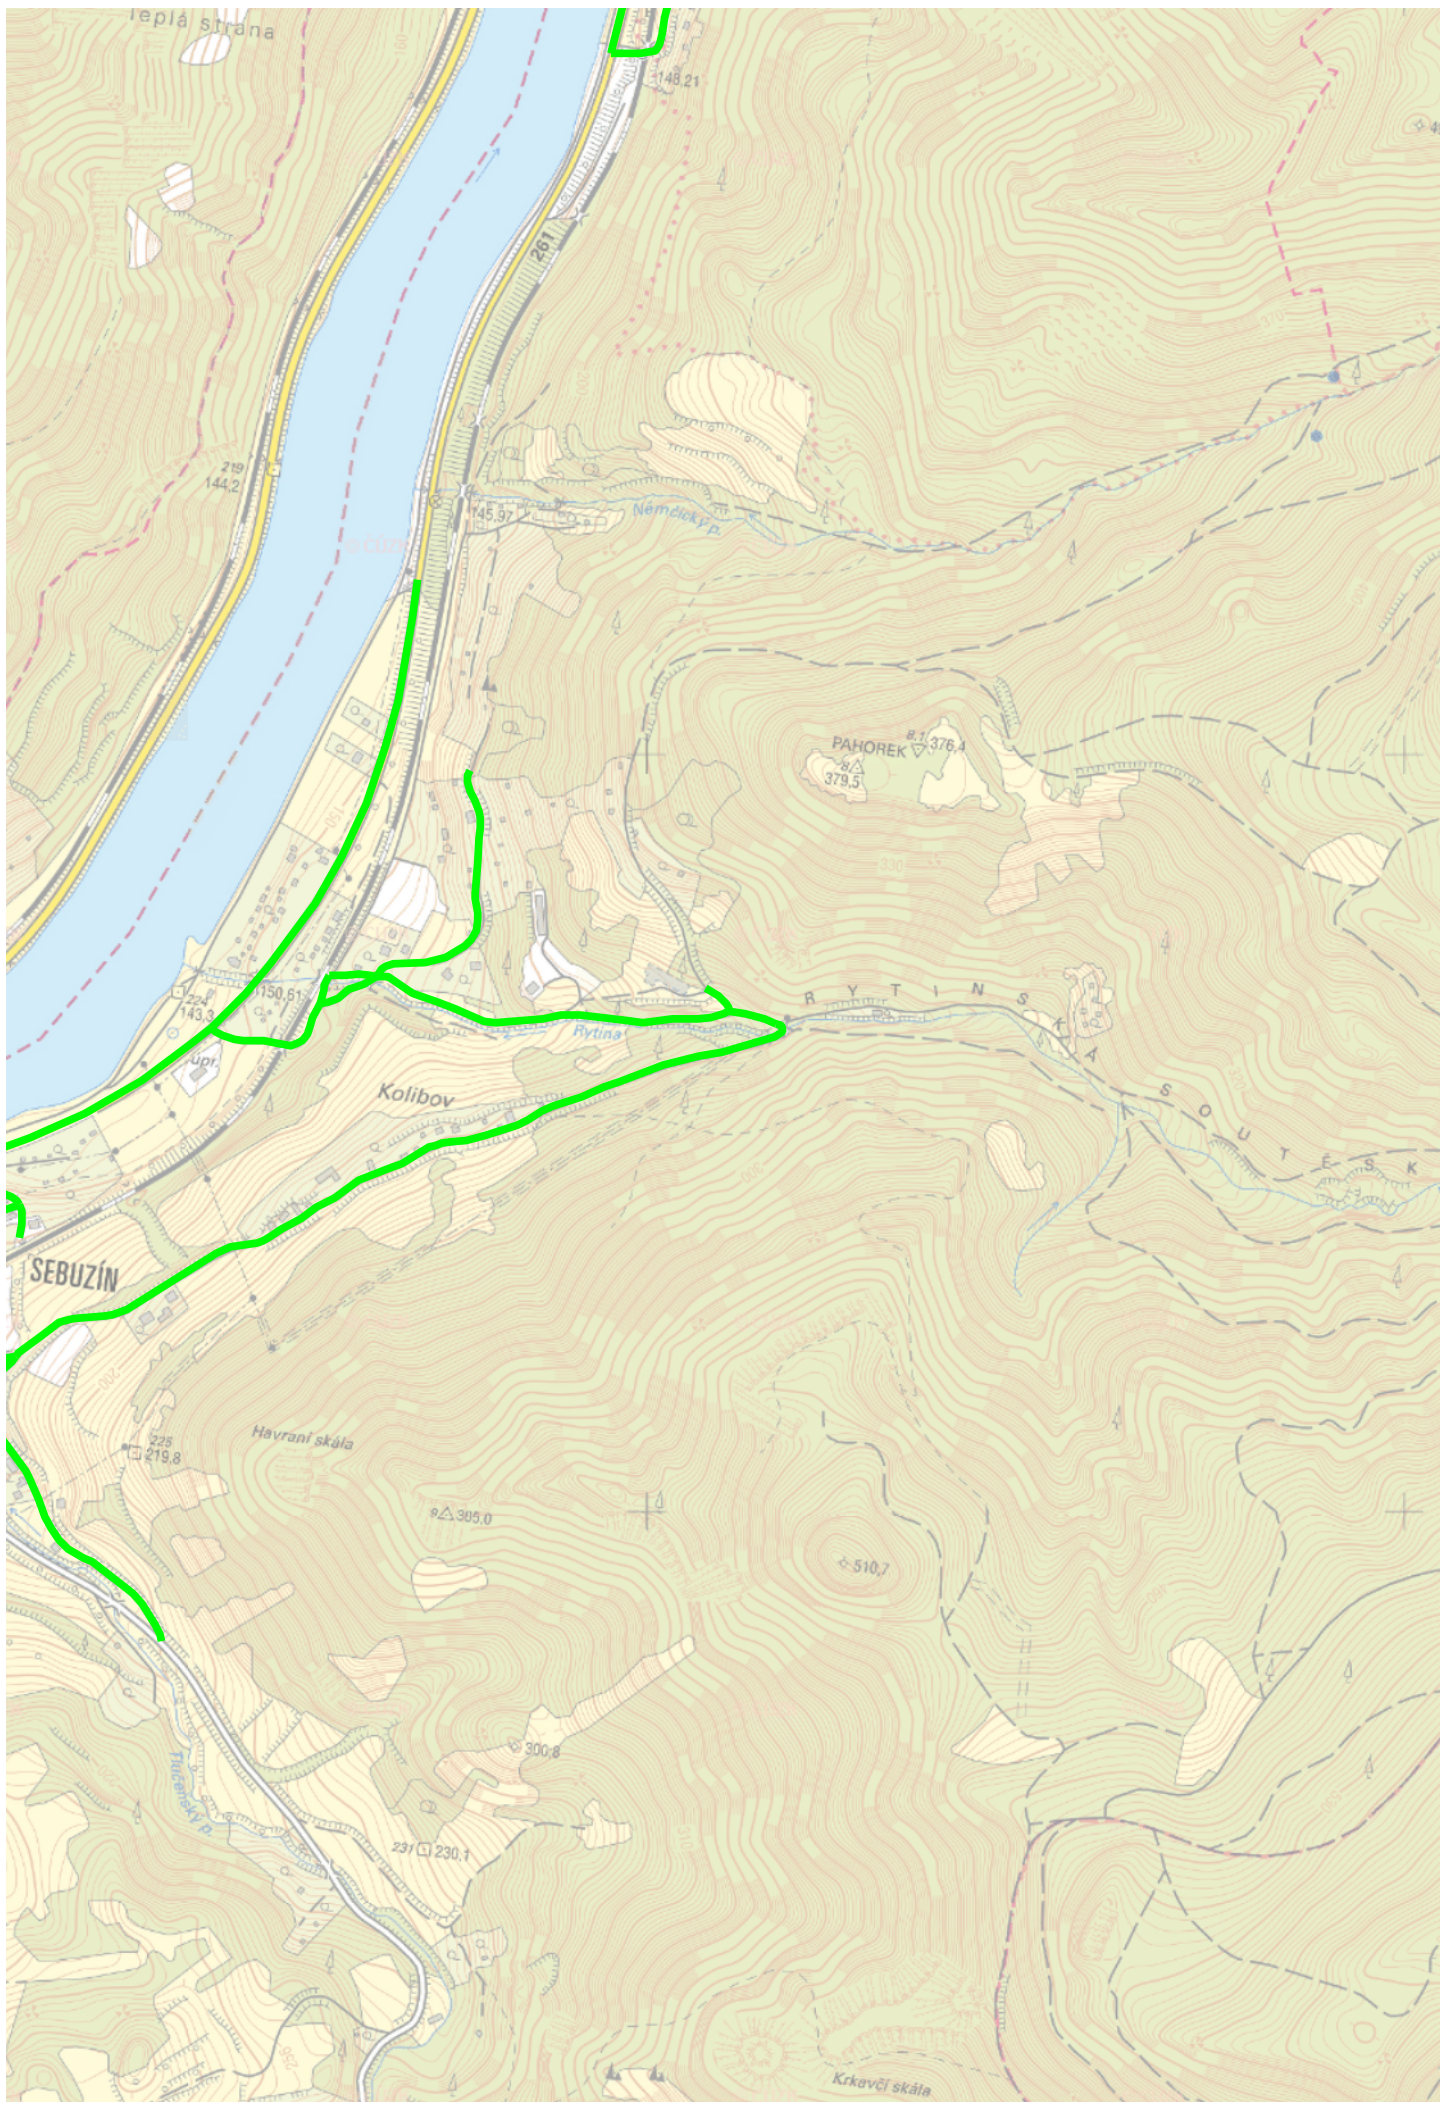

Měřítko 1 : 10000

100 0 100 200 300 400m